Dated: 17-11-2025





Online Request for Tender (e-NIT)

Renovation of Bu-Raipur Chhattisgarh along with Onsite ATM by way of Composite works.

Tender is open only for J&K Bank's empanelled Composite Contractors.

> e-NIT Ref. No.: JKB/E&ED/Raipur-Chattisgarh(Comp)/2025-1571 Dated: 17-11-2025

Issued by: J&K Bank Ltd. Estates & Engineering Department, Corporate Headquarters, Srinagar, M. A. Road Srinagar, 190 001 J&K Tele: 0194- 2402665

email: engineering.chq@jkbmail.com

Dated: 17-11-2025



DISCLAIMER

The information contained in this Tender document or any information provided subsequently to bidder(s) whether verbally or in documentary form by or on behalf of the Bank is provided to the bidder(s) on the terms and conditions set out in this Tender document and all other terms and conditions subject to which such information is provided. This tender is neither an agreement nor an offer and is only an invitation by Bank to the interested parties for submission of bids. The purpose of this tender is to provide the bidder(s) with information to assist the formulation of their proposals. While effort has been made to include all information and requirements of the Bank with respect to the solution requested, this tender does not claim to include all the information each bidder may require. Each bidder should conduct its own investigation and analysis and should check the accuracy, reliability and completeness of the information in this tender and wherever necessary obtain independent advice. The Bank makes no representation or warranty and shall incur no liability under any law, statute, rules or regulations as to the accuracy, reliability or completeness of this e-NIT. The Bank may in its absolute discretion, but without being under any obligation to do so, update, amend, supplement or annul the information in this e-NIT.



OBJECTIVE OF PROPOSAL

The Tender Details are as under:

e-NIT Reference Number	JKB/E&ED/Raipur-Chattisgarh(Comp)/2025-1571 Dated: 17-11-2025
Issuing Department Name	Estates & Engineering Department, Corporate Headquarters, M.A. Road, Srinagar 190 001 J&K
Scope of Work	Execution of Composite works by way of Tiling , ceiling, Partition ,Painting ,furniture ,electrical and other allied works
e-Tender Details	Renovation of Bu-Raipur Chhattisgarh along with Onsite ATM by way of Composite Works
BIDs Submission Mode	On-Line through Bank's e-Tendering Service Provider's Portal https://jkbank.abcprocure.com
Tender Type	limited between empanelled contractors
category	Category C and higher of composite empanelled agencies.
Type of Contract	Works
Bidding Type	Indigenous
Base Currency	INR (₹)
Validity of Rates	6 Months
Consortium	Consortium Bids are not allowed.
Contact details of concerned Department (Name, Designation, Mobile No., Email address for sending any kind of correspondence regarding this NIT)	1. Mr. Tawseef Nawaz Khan (Senior Manager Civil) Cell No. 9697518717
uiis Mii)	2.Mr. Mujeeb Manzoor Shah (I/C Electrical Dept) Cell No.7006349347
	3.Mr Nisar-ul-Nabi Draftsman 9419027096
	Dept. e-mail id:- engineering.chq@jkbmail.com
Bid Document Availability including changes/amendments, if any to be issued	NIT can be downloaded from and submitted on Bank's e-Tendering Services Provider's Portal https://jkbank.abcprocure.com from November 17, 2025, 16.00 Hrs. to November 27, 2025 15.00 Hrs.



Pre-bid Queries submission Date and Mode	All Clarifications / Queries shall be raised online only through e-Tendering Portal https://jkbank.abcprocure.com by or before November 20, 2025 17.00 Hrs. All communications regarding points / queries requiring		
Clarifications to pre-bid queries will be provided by the Bank.	clarifications shall be given online through prescribed e-Tendering Portal on November 24 2025.		
Last date and time for Bid submission	November 27 2025, 15.00 Hrs.		
Date and Time for Eligibility/ Technical Bid Opening	To be notified separately		
Submission of online Technical Bid	As prescribed in Bank's online e-Tender Portal https://jkbank.abcprocure.com		
Tender Processing Fee (Non- Refundable)	Not Applicable		
Earnest Money Deposit (EMD) [Refundable]	No EMD is to be Deposited. However, a security deposit of equivalent to 2% of lowest bid) is to be submitted by the successful bidder in the shape of CDR before a formal allotment is issued in his favour.		
Eligibility & Technical Criteria	Category C and higher of composite empanelled agencies.		
CORRIGENDUM	All the Corrigendum will be uploaded on online tender portal https://jkbank.abcprocure.com only		
	Service Provider: M/s. E-procurement Technologies Limited (Auction Tiger) , B-705, Wall Street- II, Opp. Orient Club, Ellis Bridge, Near Gujarat College, Ahmedabad- 380006, Gujarat Help Desk:		
For e-Tender related Queries	Sr. No Name		
	1 Sandhya Vekariya - 6352631968		
	2 Suraj Gupta - 6352632310		
	3 Ijlalaehmad Pathan - 6352631902		
	4 Imran Sodagar - 9328931942		



INDEX

S.NO.	DESCRIPTION	Page No
1	NOTICE INVITING TENDER	<mark>6-9</mark>
2	INSTRUCTIONS FOR BIDDER	<mark>10</mark>
3	APPENDIX TO FORM OF TENDER	<mark>11-12</mark>
4	FORM OF AGREEMENT	<mark>13-15</mark>
5	GENERAL CONDITION OF CONTRACT	<mark>16-21</mark>
6	SPECIAL CONDITION OF CONTRACT	<mark>22</mark>
7	ANNEXURES for Specifications, BOQ-cum-Commercial / Price BID Formats,	23 <mark>onwards</mark>

Dated: 17-11-2025



(I) NOTICE INVITING TENDER

Tenders are hereby invited by AGM (BSD) on behalf of Jammu & Kashmir Bank LTD. Srinagar, J&K for the project:

Renovation of B/u-Raipur Chhattisgarh along with onsite ATM by way of Composite Works.

The Bidder should be an Empanelled Contractor with the J & K Bank in the relevant trade and category as prescribed for the work.

- 1. Estimated Cost of Work: Approximately **Rs.28.07 Lacs** which includes interior, furniture, electrical Works.
 - Detailed tender document consisting of Terms and Conditions, BOQ, Technical Specification, General Terms and Conditions etc. will be available through a link from the Banks website https://jkb.bank.in/ and will be forwarded to https://jkbank.abcprocure.com.
- 3 The site for the work is available and should be inspected before quoting for this tender.
 - The time allowed for the carrying out of the work will be 120 calendar days from the date of issue of written orders/ email to commence the work, in a phased manner as decided by the Engineer In charge, J&K Bank Ltd., Srinagar.
- 4. The Bidders should digitally sign the tender in places indicated and the total amount tendered should also be written in the prescribed form.
- The bid document is available online on the website https://jkbank.abcprocure.com. The bid document can be downloaded free of cost, however, the successful bidder is required to submit a security deposit of specified amount in the shape of CDR at the time of formal allotment which will be valid till the validity of current empanelment or end of defect liability period whichever is later.. The bidder would be required to register in the web site, which is free of cost. For submission of bids, the bidder is required to have valid Digital Signature Certificate (DSC) from one of the authorized Certifying Authorities (CA). Before the deadline for submission of bids, the J&K Bank may modify the bidding documents by issuing online corrigendum. The corrigendum will appear on the web page of the website https://jkbank.abcprocure.com. Under the "Latest Corrigendum".
- 6. Documents Comprising the Bid. Only the price bid is to be uploaded online. No other document is to be submitted at the time of online bid.

A) Deadline for Submission of Bids

- Only Price Bid is to be uploaded by the Bidder online not later than the date and time indicated in the Appendix.
- To give prospective bidders reasonable time in which to take an addendum into account in preparing their bids, the J&K Bank shall extend, as necessary, the deadline for submission of bids. The J&K Bank may extend the deadline for submission of bids by issuing an amendment. In such case all rights and obligations of the J&K Bank and the bidders previously subject to the original deadline will then be subject to the new deadline.

Dated: 17-11-2025



B) Bid Opening & Evaluation

Bid Opening

• The J&K Bank inviting the bids or its authorized representative will open the bids online and this could be viewed by the bidders online.

C) Award of Contract

Award Criteria

The Bank (J&K Bank) will award the Contract to the Bidder whose Bid has been determined:

- (i) To be substantially responsive to the bidding documents and who has offered the lowest evaluated Bid price, provided that such Bidder has been determined to be:
 - a) Eligible in accordance with the provisions, and
 - b) Qualified in accordance with the provisions; and
- (ii) To be within the available bid capacity adjusted to account for his bid price which is evaluated the lowest.
- J & K Bank reserves the right to accept or reject any Bid, and to cancel the bidding process and reject all bids, at any time prior to the award of Contract, without thereby incurring any liability to the affected Bidder or bidders or any obligation to inform the affected Bidder or bidders of the grounds for the Bank's action.
- 7. The Bidder whose tender is accepted shall execute an Agreement on Rs. 100/- stamp paper reiterating the acceptance of his Execution of work on these item rates and conditions as set forth in the contract.
- 8 J&K Bank Ltd. reserves the right to reject any or all the tenders without assigning any reason thereof.
- 9. Taxes which are admissible for deduction shall be deducted at source at the rates admissible at the time of payment of the bill of contractors.
- 10. The right of acceptance of a tender will rest with the **Assistant General Manager BSD, J&K Bank Ltd., CHQ, Srinagar** who does not bind himself to accept the lowest tender and reserves with himself the authority to reject any or all the tenders received, without assigning any reason. Any tenders in whom any of the prescribed conditions are not fulfilled or are incomplete in any respect, are liable to be rejected.
- 11. Canvassing in connection with tender is strictly prohibited and the tender submitted by a Bidder, who resorts to canvassing, is liable to be rejected.
- 13 On acceptance of the tender, the name of the accredited representative(s) of the Bidder who would be responsible for taking instructions from the Engineer In Charge shall be communicated to the Engineer In charge, J&K Bank Ltd., Srinagar.
- 14 Special care should be taken to write the rates in figures.
- 15 The bidder has to bid for all works contained item wise in the BOQ. The Bank has reserved right to accept the whole or any part of the tender and the bidder shall be bound to perform the same at the rate quoted.
- 16 The Bidder at the end shall add Goods & Service Tax separately which as per the government notification shall be payable at the time of payment with respect to the prevailing government rates at that time. The individual rates filled in the Tender shall be exclusive of GST but inclusive

Dated: 17-11-2025



of all material plus labour, delivery, transportation, handling, wastage, levies and the such and include ALL costs/overheads to be incurred by the Bidder for executing these works as per the drawings, details, specifications, with the care, expertise and post execution responsibilities outlined in this Tender. No additional claim over the rates shall be entertained later.

- 17 The Tender for the work includes the Composite works as per BOQs, drawings and directions of the Engineer In charge.
- 18 The Bidder shall inspect the site before submitting the tender.
- 19 The intending Bidder should not in any way quote more than one rate per item of work. In case the Bidder splits the quantity of any item of work and quotes more than one rate for the same, his tender will be rejected. The Bidders shall quote in figures as well as in words, the rates, & the amount tendered by them. The amount for each item should be worked out and the requisite totals be given.

Sd/-

Assistant General Manager BSD

Dated: 17-11-2025



ELIGIBILITY CRITERIA AND CREDENTIALS

- The Bidder should be an empanelled Contractor of J & K Bank of category C or higher of composite trade.
- The Bidder should have minimum available Bid capacity/Financial Capability as required for the said work.

Should this tender be accepted in whole or in part, I/We hereby agree:

- 1. To abide by all terms and provisions of the said conditions annexed here to and all the terms and provisions contained in the Notice Inviting Tenders, so far as applicable and / or in default thereof to forfeit & pay to the Bank, by their successors the sum of money mentioned in the said conditions.
- 2. To execute all the works referred to in the tender documents upon the terms & conditions contained or referred to therein & to carry out such deviations as may be ordered up to a maximum of 50% (fifty percent) of the tendered value at the rates quoted in the tender documents.

<u>Digital Signature of Contractor before Submission of Tender</u>

<u>Witness</u>				
1				
2.				

Sd/-

Assistant General Manager BSD

Dated: 17-11-2025



(II) INSTRUCTIONS FOR BIDDERS

- 1. Before e-BID, the Bidders, in their interest are advised to inspect and examine the site & its surroundings and satisfy themselves in respect of the site conditions as the Bank shall bear no responsibility for lack of acquaintance of the site and other conditions or any information relating thereto, on their part. The consequences of the lack of knowledge, as aforesaid, on the part of the Bidders shall be at their risk and cost.
- 2 Before tendering, the Bidders shall carefully examine the tender documents, general conditions of contract, special conditions of contract, specifications, drawings & other matters referred to therein, the schedules and Bill of quantities and if there should be or appear to be any ambiguity in or discrepancy between any of these documents or between figured and measured dimensions and other aspects upon the Drawings, he should immediately refer the matter in writing to the Engineer In charge for clarification.
- 3 Selection of the items according to specifications and approved makes will be as per the conditions of the contract and as per the drawing attached. All the items before installing should be approved from Engineer.
- 4. The Bank will not be responsible and will not pay for expenses which may be incurred or losses to person or property suffered by the Bidder in connection with visits to an examination of the site and in the preparation of his tender for submission.
- 5. The Bidder (whether or not he submits a tender) shall treat the details of the documents as secret and confidential.
- 6. The Bank reserves the right to adjust arithmetical or other errors in any tender in the way, which it considers suitable. Any adjustments so made by the Bank shall be stated to the Bidder if the Bank shall make an offer to accept the tender.
- 7. The Bank does not bind itself to accept the lowest or any tender and has the right to refuse or accept any tender without assigning any reason (s) thereof. The Bank shall also have right either to invite more Bidders for submitting tenders or re-issue the Tenders afresh at their own discretion for which the original Bidders shall have no right of objecting any action taken in this behalf by neither the Bank nor the Bank shall be bound to any explanation in this behalf.
- 8. All documents of the tender are to be read in conjunction with each other and Bidder shall take this aspect into consideration while quoting the rates.
- 9. It will be the responsibility of the successful Bidder to keep liaison with the Bank till finalization of Letter of Acceptance or within validity period. No excuse whatsoever will be entertained for not having received the allotment letter/Letter of Acceptance through post or otherwise.

J&K Bank
Serving To Empower

(III) APPENDIX TO FORM OF TENDER

S.No	Particulars	Description
1	Earnest Money / Security Deposit:	No EMD for the Work. However, the successful bidder is required to submit a security deposit of 2% of lowest bid received in the shape of CDR at the time of formal allotment which will be valid till the validity of current empanelment or end of defect liability period whichever is later. The security deposit is to be submitted by the firm for the first successful bid only, which shall be valid for subsequent bids for other works also. The total security deposit (retention money + initial security deposit+ EMD) will be kept with the bank ,50% of the total security deposit amount shall be refunded without interest to the contractor on the issuance of virtual completion certificate by the Architect/Bank and the contractors removal of his material ,equipment ,labour force ,temporary sheds stores ,site office etc. and on receipt of physical possession of site by the bank .The remaining 50% of the total security deposit may be refunded 15 days after end of defect liability period provided he has satisfactorily carried out all the works and attended to rectification of all defects in accordance with conditions of the contract.
2	Period of commencement:	Date of issue of letter of acceptance or the date of handing over of site whichever is later.
3	Time of Completion	120 calendar days
4	Reverse Auction	The Tender shall be put to reverse auction after the last date of the submission of bids to get a final successful bidder and work shall be allotted to the lowest bidder after the reverse auction.
5	Liquidated damages for delay:	0.5% (Zero decimal five percent) of Gross Contract value per week or part thereof subject to a maximum 10% of contract value
6	Limit of liquidated damages	Up to a maximum of 10% (Ten percent) of Contract Value.
7	Defects Liability /Maintenance period	12 months from the date of issue of virtual completion certificate as issued by Engineer



8	Retention Money	From each running bill, an amount at the rate of 10% of the gross value of the running bill shall be recovered as retention money .EMD & ISD shall also form the part of the retention money till deposit of 10% of the total contract value, this amount is called Total Security Deposit which consist of three components, EMD, ISD & RM. The total security deposit will be kept with the bank ,50% of the total security deposit amount shall be refunded without interest to the contractor on the issuance of virtual completion certificate by the Architect/Bank and the contractors removal of his material ,equipment ,labour force ,temporary sheds stores ,site office etc. and on receipt of physical possession of site by the bank .The remaining 50% of the total security deposit may be refunded 15 days after end of defect liability period provided he has satisfactorily carried out all the works and attended to rectification of all defects in accordance with conditions of the contract.
9	Quantities	Quantities as per BOQ liable to change as per work done at site.
10	Running Payments	Payments should be done on running bills or stage basis as per Annexure.
11	Final Payment	Final payment shall be done after completion certificate by the engineer and joint measurements with the contractor, subject to deduction of 10% retention money which will be released after successful completion of defect liability period.

Dated: 17-11-2025



FORM OF AGREEMENT

(On Stamp Paper 100/=)

ARTICLE OF AGREEMENT made at Srinagar this	day of Two Thousand Twenty Five between J.H	۲.
BANK, having its Head office at Maulana Azad Road,	, Srinagar (J&K), through the DGM (BSD) hereinafte	er
called "Bank" (which expression shall include its suc	ccessors and assigns wherever the contract meaning	ıg
shall so require or include its successors & assigns	wherever the contract meaning shall so require of	r
permit of the one part and M/s		_)
hereinafter called the "Contractor" of the other part.	i.	

WHEREAS the Bank is desirous of having provided and getting executed, completed and maintain certain works for Renovation of Bu-Raipur Chhattisgarh along with Onsite ATM by way of composite works, enumerated or referred to the Documents forming part of the "TENDER" and acceptance, copies of all of which hereto annexed are designed to form part of this contract and are included in term "CONTRACT" wherever herein used.

AND WHEREAS the Bank accepted the tender of the contractor for the provisions of execution, completion & maintenance of work under defect liability period of the above said work.

AND WHEREAS the individual rates filled in by the CONTRACTOR are exclusive of GST but inclusive of all material plus labour, delivery, transportation, handling, wastage, levies and the such and include ALL costs/overheads to be incurred by the CONTRACTOR for executing these works as per the drawings, details, specifications, of the Engineer with the care, expertise and post execution responsibilities outlined in this Tender. THE CONTRACTOR confirms that no additional claim over the rates shall be entertained later by THE BANK.

AND WHEREAS the contractor has agreed with the Bank to execute complete and maintain during the defect liability period subject to the conditions and instructions set forth herein (hereinafter referred to as "the said conditions") the works, shown upon the documents forming part of the contract as stated hereinafter, on the item rate basis & as set forth, amounting to the contract sum of Rs. (IN WORDS) (Hereinafter referred to as "the said contract amount /Price/Sum").

NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:

- 1. The terms and conditions laid down in the documents stated herein in the Clause shall be read and construed as forming part of this Agreement and the contractor shall abide by, terms and conditions, specifications and rates specified therein and perform agreement in accordance with such conditions".
- 2. The following documents shall be deemed to form and be ready and construed as part of this agreement:
- a. The said tender and Appendix
- b. Form of Tender
- c. General conditions of Contract
- d. The Special Conditions of Contract.
- e. Specifications
- f. Preamble to bill of quantities and priced bill of quantities as accepted.
- g. The letter of Acceptance
- h. Other additional documents as required

Dated: 17-11-2025



- In consideration of the payment to be made by the Bank to the contractor for the work to be executed by him, the contractor does hereby agree with the Bank to provide, execute & complete the said work on or before the date mentioned in the time schedule of completion of work attached to the tender documents strictly as per the contract agreement and shall maintain the same at his own cost during the defects liability period , thereafter perform all such aspects and things in the contract mentioned or described or which are to be implied thereafter or may be reasonable necessary for the completion of the said works and at the time and the manner subject to the terms and conditions or stipulations mentioned in the contract.
- In consideration of the due provisions, execution and completion of the said works the Bank does hereby agree with the contractor that the Bank will pay to the contractor the respective amount for the work actually done by him and such other sums as may become payable to the contractor under the contract. Such payment to be made at any such time & in such manner as provided for in the agreement.
- 5 All disputes arising out of or any way connected with this agreement shall be deemed to have arisen in J & K and only the courts at Srinagar shall have jurisdiction to determine the same.
- 6. The several parts of this contract have been ready by/to us and fully understood by us.
- 7. This Agreement shall come into effect on ______ (the effective date). The agreement shall remain in force for a 120 Calendar days from the said effective date till the envisaged timeframe for completion or actual date of completion whichever is later
- 8. Bank shall be entitled to terminate this agreement in case of breach of any of the terms and conditions of this agreement and related tender documents after serving a notice of 20 days on the contractor.
- 9. That upon expiration or termination of this agreement for any reason whatsoever, the contractor shall; i) Immediately refrain from any action that would cause or may indicate any relationship between it and the bank . ii) Forthwith hand over to the bank, the possession of all the documents, material or any other property belonging to the bank that may be in its possession.
- 10. The bank reserve the right to terminate this agreement without assigning any reason thereof.
- 11. The contractor herby agrees and undertakes to indemnify the bank and keep it indemnified against any loss or damage suffered by the bank on account of any act or omission on part of the contractor.
- 12 The provision of this agreement, which are intended to survive the term of this agreement by their very nature, shall survive the termination of this agreement. Notwithstanding, arbitration and applicable law and jurisdiction shall survive the termination/expiration of this agreement.
- 13 The Security deposit will be forfeited by the bank in case of breach of any of the terms and conditions of this agreement.

14 IN WITNESS WHEREOF, the parties have caused their respective common seals to be here unto affixed (or have here unto set their respective hands and seals) the day and the year first above written:

Dated: 17-11-2025



NAME		NAME
ON BEHALF	OF THE BANK	ON BEHALF OF THE CONTRACTOR
1.	SEAL	SEAL
2 In Presence	ADDRESS of:	ADDRESS

e-NIT Ref.No. JKB/E&ED/Raipur-Chattisgarh(Comp)/2025-1571

Dated: 17-11-2025



(v) GENERAL CONDITIONS OF CONTRACT

1. Extent of Contract

The contract comprises the construction, completion & maintenance of the works & except in so far as the contract otherwise provides, the provision of all labour, materials, constructional plant, temporary works & everything whether of a temporary or permanent nature required in and for such construction, completion & maintenance so far as the necessity for providing the same is specified in or reasonably to be inferred from the contract.

2. Letter of Intent / Acceptance / Award

Before signing of the contract, the Bank may issue by registered post or by otherwise, depositing at the registered office of the contractor, letter of Intent / Acceptance to enter into a contract with the contract for the execution of the works in accordance with the contract. Upon issue of such Letter of Acceptance / Intent by the Bank, the Bank shall be deemed to have signified his intention to award the contract, however, the process shall be deemed to be complete only when the contract has been entered into by the Bank & the contractor. However, until a formal contract agreement is prepared & executed, the tender together with the Bank's letter of intent shall constitute a binding contract between the parties, provided the Security Deposit as required under the contract shall have been furnished by the contractor

3. Contract Agreement

Within 10 days after the issue of letter of acceptance, the contractor shall have to enter into a written deed of agreement incorporating all the terms & conditions as embodied in the Tender Documents or modified subsequently in writing and those contained in the letter of acceptance, with the Bank. The contractor shall not sub-contract the work without written permission of the Bank.

The following documents shall be deemed to form and be ready and construed as part of the contract agreement.

- a) The said Tender & Appendix
- b) Form of Tender
- c) General Conditions of Contract
- d) Special conditions of Contract
- e) Letter of Acceptance
- f) Contract Price
- g) Priced bill of quantities as accepted.
- h) Specifications
- l) Drawings
- j) Other additional documents as required.

4. Language (s)

The language in which the contract documents shall be drawn up shall be English.

5. Documents Mutually Explanatory

Except if & to the extent otherwise provided by the contract, the provisions of the conditions of contract shall prevail over those of any other document forming

Dated: 17-11-2025



part of the contract. Subject to the foregoing, the several documents forming the contract are to be taken as mutually explanatory of one another but in case of ambiguities or discrepancies, the same shall be explained & adjusted by the Site Engineer who shall thereupon issue to the contractor instructions directing in what manner the work is to be carried out.

6. Contractor's General Responsibilities

The contractor shall, subject to the provisions of the contract, and with due care & diligence, execute, complete & maintain the works & provide all labour including Supervision, materials, constructional plant & all other things, whether of a temporary or permanent nature, required in and for such execution, completion & maintenance so far as the necessity for providing the same, excluding those to be provided by the Bank is specified in, or is reasonably to be inferred from the contractor. Temporary electric, water charges & any other extra charges shall be paid by the Contractor & nothing shall be paid by the Bank.

The contractor shall carry out and complete and maintain the works in accordance with accepted good engineering practices and using materials and workmanship of the quality and standards therein specified provided that where and to the extent that approval of the quality of materials or of the standards of workmanship is a matter of option, such quality & standards shall be to the satisfaction of the Bank or Engineer in Charge or his Representative.

7. Safety of Site Operations

The contractor shall take full responsibility for the safety, stability and adequacy of all site operations and methods of construction including all temporary works, provided that the contractor shall not be responsible, except as may be expressly provided in the contract, for the design or specification of the permanent works.

8. Absence of Specification

If the specifications do not contain particulars of materials and works which are obviously necessary for the proper completion of the works, and the intention to include, which is inferred, all such materials and works shall be supplied and executed by the contractor without extra charge. If the contractor requires additional information, he shall, so request in writing, well in advance to commencement of the particular work, to the Engineer In charge who will issue such detailed information as necessary within a reasonable time.

If, however, during the execution of the works, the contractor shall encounter physical conditions or obstructions constituting Force Majeure and which could not have been reasonably foreseen by an experienced contractor, the contractor shall forthwith give written notice thereof to the Engineer In Charge / Engineer's representative within two weeks after its occurrence and if in the opinion of the Engineer In Charge, such conditions or obstructions until so instructed by the Engineer In Charge except in the event of there being an urgent need to undertake remedial or other works or repairs to reduce risks of injuries or damages to persons or property.

9. Obtaining Information related to execution of work

No claim by the contractor for additional payment will be entertained which is consequent upon failure on his part to obtain correct information as to any

Dated: 17-11-2025



matter affecting the execution of the works nor will any misunderstandings or the obtaining of incorrect information or the failure to obtain correct information relieve him from any risks or from the entire responsibility for the fulfillment of the contract.

10. Work to be to the satisfaction of Bank

The contractor shall execute, complete and maintain the works in strict accordance with the contract to the satisfaction of the Bank & shall comply with and adhere strictly to the Engineer's instructions and directions on any matter (whether mentioned in the contract or not) touching or concerning the works. The contractor shall take instructions and directions only from the Engineer. All execution of works & materials should be as per tender specifications. Materials for which specification is not given in tender in that case prior approval from the bank. Contractor is strictly advised not to use substandard materials. And if any substandard material is used or found then a penalty of two times the difference in cost of standard material less substandard material must be collected from the vendor/ sub-contractor. i.e.; Penalty= 2x(Cost of Standard Material- Cost of Sub Standard Material) or bank have the right to hold the cost of that particular item and entire amount of the project will not be paid.

11. Night or Sunday Work

As the site is in a crowded market, keeping in view the sensitivity of the site, the contractor can be asked to do the work at night, by special order, the contractor would be required to carry out the work at night, without conferring any right on the contractor to claim extra payment for night working. The decision of the Engineer in charge in this regard will be final and binding on the contractor.

12. Corrupt and Fraudulent practice.

- It is required that Bidders observe the highest standard of ethics during the procurement and execution of such contracts and not to indulge in any corrupt and fraudulent practice.
- "Corrupt Practice" means the offering, giving, receiving or soliciting of anything of value to influence the action of an official in the procurement process or in contract execution.
- "Fraudulent Practice" means a misrepresentation of facts in order to influence a procurement process or the execution of contract to the detriment of the Bank and includes collusive practice among Bidders (prior to or after bid submission) designed to establish bid prices at artificial noncompetitive levels and to deprive the Bank of the benefits of free and open competition.
- The Bank reserves the right to reject a proposal for award if it determines that the Bidder recommended for award has engaged in corrupt or fraudulent practices in competing for the contract in question.
- The Bank reserves the right to declare a Bidder ineligible, either indefinitely
 or for a stated period of time, to be awarded a contract if at any time it
 becomes known that the firm has engaged in corrupt or fraudulent practices in
 competing for or in executing the contract.

13. Liquidated Damages:

Dated: 17-11-2025



Should the work not be completed to the satisfaction of the Site Engineer within the stipulated period due to Contractors default, the contractor shall be bound to pay to the Bank, a sum calculated as below by way of liquidated damages and not as penalty during which the work remains uncommented or unfinished after the expiry of the completion date.

If the contractor fails to complete the work by the scheduled date of completion or within any sanctioned extended time, he will have to pay liquidated damages at rate of 0.5~% of the contract value for each week of delay subject to maximum of 10~% of the contract value.

14. Force Majeure:

- i. The Selected Bidder shall not be liable for forfeiture of its performance security, Liquidated damages or termination for default, if any to the extent that its delay in performance or other failure to perform its obligations under the contract is the result of an event of Force Majeure.
- ii. For purposes of this Clause, "Force Majeure" means an event explicitly beyond the reasonable control of the Contractor and not involving the contractors fault or negligence and not foreseeable. Such events may be due to or as a result of or caused by act of God, wars, insurrections, riots, earth quake and fire, revolutions, civil commotion, floods, epidemics, quarantine restrictions, trade embargos, declared general strikes in relevant industries, satellite failure, act of Govt. of India, events not foreseeable but does not include any fault or negligence or carelessness on the part of the parties, resulting in such a situation. In the event of any such intervening Force Majeure, either party shall notify the other in writing of such circumstances or the cause thereof immediately within five calendar days.
- ii. Unless otherwise directed by the Bank in writing, the selected contractor shall continue to perform its obligations under the Contract as far as is reasonably practical, and shall seek all reasonable alternative means for performance not prevented by the Force Majeure event.
- iv. In such a case the time for performance shall be extended by a period(s) not less than duration of such delay. If the duration of delay continues beyond a period of three months, the Bank and the contractor shall hold consultations in an endeavor to find a solution to the problem.
- v. Notwithstanding above, the decision of the Bank shall be final and binding on the contractor regarding termination of contract or otherwise."

15. Available Bid Capacity/Financial Capability:

The bidder should possess the bidding capacity as calculated by the specified formula. The formula generally used is:

Available bid capacity = $(A \times M \times N)$ - B, where

A = Maximum value of engineering (Civil/ Electrical/ Mechanical as relevant to

Dated: 17-11-2025



work being procured) works executed in any one year during the last five years (updated at the current price level), taking into account the completed as well as works in progress.

M = Multiplier Factor (usually 1.5)

N = Number of years prescribed for completion of the work in question.

B = Value (updated at the current price level) of the existing commitments and ongoing works to be completed in the next 'N' years.

All costs and expenses incurred by interested bidders in any way associated with the development, preparation and submission of responses, including but not limited to the attendance at meetings, discussions etc. and providing any additional information required by the Bank, will be borne entirely and exclusively by the Bidder.

16. Electronic Reverse Auction.

The said work shall be put to electronic reverse auction before opening of the financial bids.

Electronic Reverse Auction is a type of auction where the starting price, bid decrement, duration of auction, maximum number of automatic extensions are announced before start of online reverse auction. The shortlisted bidders shall after the start of RA start bidding online in an iterative process wherein the lowest bidder at any given moment can be displaced by an even lower bid of a competing bidder, within the duration of the RA. If a new lower bid is received within last few minutes (say two minutes) of closing time, the closing time may get automatically extended by few minutes (at least five minutes) for others to respond. Maximum number of such extensions may be stipulated (at least five). The most favorable bid at the end of stipulated/extended time will be declared as successful. The Reverse Auction shall be scheduled for a fixed time period. Auctions may be arranged in any combination of time periods for e.g. (a) 1-1/2 hour viz. 1 hour with 6 extensions of 5 minutes each or (b) 1 hour viz.1/ 2 hours with 6 extensions of 5 minutes each or (c) Unlimited extensions viz. 1/2 hour with unlimited extensions of 5 minutes each.

All the price bids (Indicative bids) submitted by the vendors shall be kept sealed to the event of e-reverse auction. At the end of reverse auction process the lowest Bidder (L1) will be selected on the basis of Total Price, including taxes.

In case the Prices arrived after Reverse Auction are more than the Indicative prices of any of the vendors, The Lowest Indicative prices of the vendor shall be considered and that vendor shall be declared the Lowest Bidder.

Bidding Example:

The final rates of the items shall be calculated in ratio of total amount quoted by the lowest bidder through reverse auction process and the amount quoted in indicative price bid, wherever specified in tender.

Example:

Indicative Price Bid submitted by vendor:

Item	Rate ®	Qty	Amount
Α	100	2	200
В	200	3	600
С	300	4	1200
Total amount in Indicative price Bid			2000/-

The total amount mentioned in indicative price bid is Rs 2,000.00, but the final L-

Dated: 17-11-2025



1 amount quoted by the vendor through E-reverse auction is Rs.1,600.00, then the K factor for L-1 vendor will be calculated as under

Ratio K= (Total amount quoted by the lowest bidder through reverse auction process) / (The amount quoted in indicative price bid) K=1600 /2000= 0.8.

The item wise final price to be confirmed by the vendor shall be as under:

Item	Final Rate= K*R	Qty	Amount
Α	100*0.8	2	160
В	200*0.8	3	480
С	300*0.8	4	960
Total amo	unt worked out after e- rev	erse auction	1600/-

- 17. After execution of the agreement with the successful bidder the relation of parties will be on principal to principal basis.
- **18.** The Bidder shall not assign or outsource the works awarded by the Bank without the written consent of the Bank.
- 19. The successful bidder shall indemnify and keep J & K Bank, its Officers, Directors, employees indemnified in respect of any loss, damage or claim howsoever arising out of or related to breach of contract, statuary duty or negligence by the firm or its staff, agents in relation to the performance or otherwise of the services to be provided under the contract.
- **20.** <u>Dispute resolution/arbitration:</u> In the case of any dispute arising upon or in relation to or in connection with this agreement between parties, the disputes shall at the first instance be resolved through negotiations. If the dispute cannot be settled amicable within fourteen (14) days from the date on which either party has served written notice on the other of the dispute then any party can submit the dispute for arbitration under arbitration and conciliation Act, 1996. The sole Arbitrator shall be chosen by the bank.

The Place of Arbitrations shall be Jammu, India and the language of the arbitration proceedings and that of the documents and communication between the parties shall be English.

The Decision of the Arbitrator shall be final and binding upon the parties. The expenses of the arbitrator as determined by the arbitrator shall be borne equally.

The parties shall continue to be performing their respective obligation under this Agreement, despite the continuance of the arbitration proceedings, except for the disputed part under arbitration.

- **21.** Each Bidder having responded to this NIT acknowledges to have read, understood and accepts the selection & evaluation process mentioned in this NIT documents. The bidder ceases to have any option to object against any of these processes at any stage subsequent to submission of its responses to this NIT.
- 22. All Notices or Communications under this software maintenance Agreement shall be first sent to E- mail to such e mail addresses designated by each party, followed by registered post with acknowledged, where appropriate and required, to the address of each party first written above. A successful e mail delivery shall be treated as sufficient and complete delivery of the notice or communication. A notice by post will be sent by registered post acknowledge to the address set forth below, or such other address as it shall hereafter designate for this purpose:

In the case of a notice to the bank to:engineering.chq@jkbmail.com

Dated: 17-11-2025



In the case of a notice to contractor: email address registered with the bank.

Such notices shall be deemed to be received within four working days of the same being sent.

- 23. Bank reserves the right to select the next ranked bidder, if after selection the selected bidder withdraws his offer or bank detects wrong or misleading information in the proposal, In case the selected bidder withdraws his offer or if it is found that the information furnished by the bidder is wrong and misleading. Bank reserves right to take action as it deems fit, including forfeiture of EMD, claim for damages against the bidder.
- 24. Labour License: All the Bidders must necessarily possess a valid Labour license (if applicable) obtained from concerned Govt. labour department. The said license is necessary for executing contract works under relevant provisions of different laws for the time being in force including but not limited to the Contract Labour (Regulation & Abolition) Act, 1970. It may be noted that no work order/Allotment shall be issued to the lowest bidders not submitting the relevant labour license.
- 25. Security Deposit: No EMD is to be submitted with the tender documents. However, this being a limited tender among the already empanelled agencies, the agency quoting the lowest bid has to submit a security deposit of 2 % of the bid amount for a particular work. The security deposit shall be retained till the empanelment is valid or defect liability period of the particular work, whichever is later.

Pertinently, an agency getting multiple works through the tendering process shall have to deposit security

Deposit for every work, subject to a maximum aggregate ceiling kept by the bank for a particular category an agency is empanelled in.

Example:

Consider an agency empanelled in "A" Category of Civil trade (1 crore to 2 crores). The an aggregate security deposit of Rs.3,00,000/- for the said agency has to submit category i.e. 2 % of the average limit of the category --- 2% of (1(Lower limit of category)+2(Upper limit of category))/2 = 3.0 Lacs. So the successful bidders will keep depositing 2 % of the bid value for each work till their aggregate security deposit with the bank reaches the limit of the category he/she is empanelled for

Dated: 17-11-2025



(VI) SPECIAL CONDITIONS OF CONTRACT

- 1. If the Bank feels necessity of amending the specifications and or installing of any Equipment / material which have not been quoted for by the contractor, the same shall have to be installed by the contractor which shall be paid as per actuals based on LMR and analyzed as per CPWD Schedule of Rates and analysis.
- **2.** The commercial Bids of only those contractors / firms who qualify the prequalification laid by the Bank shall be considered.
- **3.** The work shall be carried out strictly according to the terms & conditions, specification, design, drawing and plans. Where specifications do not cover any item, the specifications, terms and conditions of UT PWD / CPWD/ PDD in force shall be made applicable. All other terms and conditions not covered but in vogue in the CPWD shall hold good and form a part of the e-NIT.
- **4.** No advance payment in the form of site mobilization advance, material advance etc. will be paid to Contractor. Running payments will be released after satisfactory completion of the portion of the works and measurement.
- **5.** All other terms and conditions not covered but in vogue in the CPWD shall hold good and form a part of the e-NIT.
- **6.** In the event of contract failure Bank reserves the right to terminate the contract after giving 20 days clear notice to the contractor and recover the amount of the loss caused by the damage, failure, default (including the consequently damage) as may be determined by The AGM J&K Bank or his authorized representative.
- **7.** In case of any permission from housing societies, government bodies etc the same shall be arranged by the contractor without any extra cost.

Dated: 17-11-2025



(VII) ANNEXURES

- a) SPECIFICATION AND BOQ FOR COMPOSITE WORKS
- b) DRAWINGS
- c) LIST OF APPROVED MAKES
- d) STAGE PAYMENT SCHEDULE
- e) PRICE/COMMERCIAL BID FORMAT FOR COMPOSITE WORKS

J&K Bank

Annexure A SPECIFICATIONS, BOQ FOR COMPOSITE WORKS

	BASIC CIVIL WORKS	unit	Qty
1	Cement Concrete		
	Providing and laying of cement concrete with crushed stone aggregates (quarry) 20mm nominal size including curing but excluding form work.		
	A) 1:3:6 (1 cement : 3coarse sand : 6 crushed stone aggragate 20mm		
	n/s)	Cu m	10.34
	B) 1:1.5:3 (1cement : 1.5coarse sand : 3 crushed stone aggragate 20mm n/s)	Cu m	0.55
2	Steel Work		
a)	Reinforcement for RCC work including straightening, cutting, bending, placing in position and binding all complete with (Cold twisted bars)	KG	41.81
b)	p/f of MS grill of required pattern in frames of windows etc with MS flats, square or round bars etc including priming coat with approved steel primer all complete , fixed to openings /wooden frames with rawl plugs screws etc	KG	125.00
3	Brick Work	NO	123.00
	Brick work in 1:6 masonry 1 cement :6 coarse sand with 2nd class (75A or 100B) bricks in superstructure above plinth level upto floor two level 9" Wall 1:6 (1cement:6 coarse sand mix)	Cu. M	8.01
4	Plaster Works	Cu. M	0.01
	15mm Cement plaster on the rough side of single or half brick wall of mix: (1 cement: 6 fine sand)	SQ. M	111.27
	FINISHED CIVIL WORKS		
5	Vitrified Tiles		
	Providing and laying full body glazed polished vitrified tile free from all visible defects of size 600x600 (thickness to be specified by manufacturer) with water absorption less than 0.5% and conforming to ISO 13006:2018 of approved make Kajaria or RAK or Johnson and approved shade (Kajaria Shade 6603, Salt & Pepper (series Stonegres) or RAK (Coarstone Crema) or Johnson (S&P Beige) laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand) in all shapes & patterns and skirting (4"- to be measured in SFT) with cement mortar or chemical -complete job.	SFT	1,467.66
6	Ceramic Tiles		
	P/L of Ceramic Tiles free from all visible defects walls tiles of size 450x300mm and matching floor 300 x 300mm of 1st quality confirming to IS: 13755, KAJARIA, Hindware, Johnson laid over a 20mm thk bed of cement mortar 1:4 (1 Cement (ACC, Ambuja, ultratech or eq) :4 Corase sand) including pointing the joints with white cement and matching pigment etc. complete	SFT	260.33
		ווכ	200.33



7	Granite Work		
	Providing and Laying of Granite and 20 - 25mm thick over 20mm thick cement mortar 1:4 mix(1 cement :4 Coarse sand) and jointed with white cement slurry with pigment to match the shade with granite including cost of all material & labour	CET	222.50
8	Moulding (Granite Work)	SFT	322.58
	Moulding of Granite work including grinding and polishing on front nosing including all charges- complete job		
	A) Single line Moulding	RFT	214.00
	B) Double line Moulding	RFT	5.35
	POP AND FALSE CEILING WORKS		
9	Wall putty		
A	Providing and applying wall putty to walls using approved quality, following relevant specifications including all necessary surface preparation, making level pads, scaffolding, cleaning etc. complete at all levels and heights	SFT	3,205.41
10	Gyp Ceiling		,
	P/F of gyp board ceiling (Gyproc, USG Boral or eq) 12.5 mm thk over frame work with G.I suspended metal galvanized frame work and hangers of appropriate design with section spaced at 450 mm max. with intermediate supports spaced at 1220mm max in ceiling and jointing / taping the gyp in a manner to give a seamless look- all complete	SFT	1,389.15
	ON SITE CARPENTARY WORKS		
11	Partition, Gyp Finish		
A	P/F of Partition having composite thickness of 99mm consisting of frame and double skin 12mm thk plywood (Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq) and also double skin 12.5mm thk gypsum board (Gyproc, USG Boral or eq), including P/F of frame work made of Almunium of 2" x 1.5" section fixed to floor/ ceiling at a spacing of 600mm c/c by 6mm dia nuts and bolts and studs at both ends - complete job including jointing / taping the gyp in a manner to give a seamless look- all complete.	SFT	254.70
b)	Gyp cladding-providing doing gyp clading made of 12mm single ply greenply and single skin 12.5mm gyp board gyproc, USG boral over Al framework of 2"x1.5" section Complete Job.	SFT	115.56
12	P/f of frame work of alumunium for connecting partitions to ceiling spaced at 600mm c/c, section of Al 2"x1.5" complete job including nuts, bolts and studs, labour and material. (Works above false ceiling level)		
43	,	SFT	54.55
13a	P/F of toughened glass (saint Gobain, Asahi India glass, Gold Plus or eq) for doors including making of holes etc. for different types of patch fittings - complete job including cost of labour and materials but excluding cost of patch fittings.	SFT	71.16
13b	P/f of toughened glass in glazed partitions of approved brand ,manufacture (saint gobain,asahi glass ,gold plus) including groving of surfaces or providing SS L connectors for glass fitting-complete job	CET	201.56
	including cost of labour and material 12mm thick	SFT	201.30



14	P/F of float glass (saint Gobain, Asahi India glass, Gold Plus or eq) in , partitions and windows. Complete Job		
	A) 12mm thick Glass	SFT	35.31
15	P/F of Beeding (3.5 inches wide) on the joints of gyp and glass in partitions made out of 4mm thick American natural walnut veneer (Make Century, Billion Maglo, Greenply or Eq) duly polished in melamine of approved color - complete job including cost of materials and labour, (Analysis attached)	RFT	246.10
	PAINTING AND FINISHING WORKS	101	210.10
16	Wall/Ceiling painting with acrylic emulsion paint of approved brand (Asian paints, Nerolac, Dulux, Berger or eq) to give an even shade and color after thoroughly brushing the surface, clean of all greaze and dirt, loose pieces of seals including preparing the surface with sand paper smooth (complete job including cost of materials and labour) (Painting to be done with the help of rollers on walls and ceiling)		
	A) With Priming Coat	Sq.M	389.00
17	Painting two coats of synthetic enamel over wood/steel and wood/steel based surfaces of approved brand (Asian paints, Nerolac, Dulux, Berger or eq) and shade including cleaning the surface from all dirt, dust and foreign matter knotting and sandpapering (complete job including cost of materials and labour)		
	A) With Priming Coat	Sq.m	109.74
	HARDWARE ITEMS		
18	P/F of different hardware items of approved brand and specifications.		
<u>1</u>	Floor Spring (DORMA-BTS -65 / ENOX-843 / Ozone 8400) with spindle , cover plate, top and bottom patches, pivot and lock, SS Handle complete set	SET	3.00
<u>2</u>	Dead lock (Godrej)	No.	1.00
3	Handle 8" (Godrej,link)	No.	14.00
<u>4</u>	Side Lock for Rolling Shutter	No.	2.00
<u>5</u>	tower bolt 6"	No.	4.00
19	P/F of chlorinated polyvinyl chloride (cpvc)pipes having thermal stability for hot & cold water supply including all CPVC plain and brass threaded fittings,this includes jointing of pipes and fittings with one step CPVC solvent cement and testing of joints complete as per directions of Engineer in charge		
a	(A)internal work concealed fixing the pipe with clamps at 1.00 metre spacing including cutting chases and making good the walls etc ,20mm nominal outer dia pipes	RM	15.00
b	(A)internal work concealed fixing the pipe with clamps at 1.00 metre spacing including cutting chases and making good the walls etc ,16mm nominal outer dia pipes	RM	10.00
 			. 5.55



20	Sanitary items		
1	Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per IS:13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls and other surfaces wherever required, (Kitchen sink without drain board, size 470x420 mm bowl depth 178 mm)		
		No.	1.00
2	Supply, installation, testing and commisioning of hot water electrical operated Geyser of approved make, should have minimum three Star Rating, Auto off Function, inner tank should be of Stainless steel with Glass lined coating, Body: Metallic/Acrylonitrile butadiene styrene, 2 Year Warranty on electrical parts and heating element, 5 yer warranty on inner tank, Inlet & Outlet connector of water should be of brass (Venus, Crompton, Havells, Bajaj, Racold, Jaquar, Morphy Richards or eq)		
	i) Capacity 03 ltrs	No.	1.00
3	CP Wall / Basin Mixer (Basic series, Jaquar, Hindware, Cera or eq)	No.	1.00
4	CP Angle valve (Basic series, Jaquar, Hindware, Cera or eq)	No.	3.00
5	9	No.	1.00
6	C P Towel Ring (6" Dia)	No.	1.00
7	C P Towel Rod (1' - 6" length)	No.	1.00
8	Beab Cock, long nose / short nose (Basic series, Jaquar, Hindware, Cera or eg)		
9	PVC Connections (15mm Dia) 1' -6" Length	No.	1.00
10	CP Cups	No.	2.00
11	CP Soap Case	No.	2.00
12	CP Hanger (6 No. Hooks)	No.	1.00
13	CP Long Bend	No.	1.00
14	PVC Waste Pipe	No.	1.00
15	•	No.	1.00
16	3" PVC Pipes (B _ Type) (Finolex, Astral, Prince, Supreme or eq)	Rft Rft	15.00 10.00
17	PVC P _ Trap (4") (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
18	PVC P- Bend(4") (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
19	PVC P- Bend(3")PRINCE (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
20	PVC Floor Trap(4") (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
21	PVC Tee(4")PRINCE (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
22	PVC Tee(3")PRINCE (B- Type, Finolex, Astral, Prince, Supreme or eq)	No.	1.00
21	Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive with ball chain pulley automatically locked on release of ball chain. Plastic idler plug roller tuhes corrosion proof outside dia 38mm, bottom rail stiffening element, ball chain acetel balls endless, Fabric 100% Polyester with Width of 2.60 mtrs & vane size is 2" complete to the entire satisfaction of engineer-in-charge (Size of window opening to be measured)	Sqm	10.74



	Description was allowed to formers of the first terms of the first ter		1
22	Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood	Cft	2.340
23	collapsible shutter		
	collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer	Sft	31.00
24	Demolition of existing RCC Ducts, brick work, stair, partitions etc. and disposing the same upto a lead of 50mtrs.		
a	Removal of existing Cement Concrete in 1:3:6 mix	Cu.M	10.00
Ь	removal of floor /wall tiles	Sft	1,500.00
С	Removal of gyp /laminate partition ,cladding,glazed partitions etc	Sft	400.00
d	removal of gyp ceiling with frame	Sft	1,365.00
е	removal of ACP with frame	Sft	500.00
f	Removal of cash cabins	Rft	7.00
g	Removal of work stations, officer tables etc with pedestals side table etc	Rft	35.00
	removal of existing storgae almirah ,racks etc	Sft	200.00
i	carriage of materials by mechnaical transport including loading ,unloading and stacking upto 20kms	Cu.M	18.00
25	Providing and applying 6mm plaster of paris (POP) to walls and ceilings using approved quality, following relevant specifications including all necessary surface preparation, making level pads, scaffolding, cleaning etc. complete at all levels and heights.	Sft	500.00
	Repairs to the existing rolling shutter scope of job comprising of removal of rolling shutter from within premises and then later resizing same and then installing rolling shutter after providing proper lubrication for smooth functioning, complete job	Sft	160.00
27	Applying Silicon adhesive Band (999) Glue in ACP joints & gap filler.	RFT	90.00
28	P/F of Aluminium composite panels (ACP) of ALSTONE, EUROBOND, VIVA, or eq. in wall cladding ceiling and over frame of Aluminium offset with necessary screws and dash fasteners (4 mm thick with 0.25 mm skin thickness), complete job.	SFT	513.60
29	P/F of various Aluminium sections in & under ACP on walls, ceiling and frame of doors with necessary screws & dash fasteners but excluding cost of ACP:		
	1"x1.5"	Rft	275.00
	2.5"x1.5"	Rft	70.00
30	ply ceiling made of 12mm ply single skin over Al framework	Sft	120.90

J&K Bar

2 Cash Tellers Table Manufacturing and fixing of Cash counters of "face to face type" of approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam, Merino, century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All complete Aunufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished internally in 0.8mm laminatel of approved make (Greenlam, Merino, century or Eq) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade. Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All complete Side Credenza M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The Tan SF Merino lam or 134/2134 Mud Ash suede Gree				
M/F of front desk/ running counters of "face to face Type" of approved design and specifications made out of 18mm & 12mm thick post formed top. The front apron of the front desk to be made of 18mm & 12mm thick post formed top. The front apron of the front desk to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam,Merino,century or Eq) and shade. The legs of the counter to make in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete 2 Cash Tellers Table Manufacturing and fixing of Cash counters of "face to face type" of approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidoply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam,Merino,century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete Manufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer of approved make for Reyboard. The front apron and bottom top of table to be finished in Caenum,Merino,century or Eq) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 1mm thk laminate of approved make & sh	Α	FURNITURE(LOOSE/ BOUGHT OUT/ ASSEMBLED)		
design and specifications made out of 18mm & 12mm thick plywood (Sainik, Ecotec, Century, Archid or Eq) with 35mm thick post formed top. The front apron of the front desk to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam, Merino, century or Eq) and shade. The legs of the counter to make in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails, taping, screw etc.(excluding cost of budloo jaali and glasses), All complete Manufacturing and fixing of Cash counters of "face to face type" of approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam, Merino, century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All complete Manufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq), side panels and top of table finished in american walnut veneer of approved make gorealment of approved make shade. Omplete St. 3 Unit Heads Table Manufacturing and supplying a "Unit Head Table" of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century,	1	Front Desk		
Manufacturing and fixing of Cash counters of "face to face type" of approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam,Merino,century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq.). Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete Manufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq.), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished in ternally in 0.8mm laminatel of approved make (Greenlam,Merino,century or Eq) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade.Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete Side Credenza M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq.), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan is Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include		design and specifications made out of 18mm & 12mm thk plywood (Sainik, Ecotec, Century, Archid or Eq) with 35mm thick post formed top. The front apron of the front desk to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam, Merino, century or Eq) and shade. The legs of the counter to make in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All	R ft	17.22
approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam,Merino,century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete Manufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished internally in 0.8mm laminatel of approved make (Greenlam,Merino,century or Eq) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade. Complete job including all hardwares like channel nails,taping,screw etc.(excluding cost of budloo jaali and glasses), All complete 4 Side Credenza M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved br	2			
Manufacturing and supplying a "Unit Head Table" of desired dimensions, made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq.), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished internally in 0.8mm laminatel of approved make (Greenlam, Merino, century or Eq.) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade. Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All complete S ft 4 Side Credenza M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq.), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq.). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include		approved design and specifications made out of 18mm & 12mm thk plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 35mm thk top made out of post formed top. The front apron of the cash teller to be made of 18mm & 12mm thick ply of approved make for Resis of wooden Jali, the front and back side of apron to be finished with 0.8mm thk laminate of approved make (Greenlam, Merino, century or Eq) and shade. The legs of the cash counter to made in 12mm ply of approved make and finished in 4mm thick American natural walnut Veneer (Make Century, Billion Maglo, Greenply or Eq). Complete job including all hardwares like channel nails, taping, screw etc. (excluding	R ft	4.73
made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq.), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished internally in 0.8mm laminatel of approved make (Greenlam, Merino, century or Eq.) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade. Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of budloo jaali and glasses), All complete S ft 4 Side Credenza M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq.), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq.). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include	3	Unit Heads Table		
M/S a "Side Credenza" for officers Tables of desired dimensions, outer framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include		made out of 18mm & 12mm plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) with 3" thk top finished in american walnut veneer natural (Make Century, Billion Maglo, Greenply or Eq.), side panels and top of table finished in american walnut veneer of approved make polished in melamine of approved shade, with a single line drawer finished internally in 0.8mm laminatel of approved make (Greenlam, Merino, century or Eq.) and shade to be provided for keyboard. The front apron and bottom top of table to be finished in 0.8 mm thk laminate of approved make & shade. Complete job including all hardwares like channel nails, taping, screw etc. (excluding cost of	S ft	32.03
framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include	4			
		framework for top and side made out of 18mm plywood (Sainik, Ecotec, Century, Archid or Eq), and all exterior faces to be finished in 1mm thk laminate of approved shade 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick). The drawers are to be fabricated out of 12mm thick plywood (Green Ecotec, Century Sainik, Archid Silvi or Sonear ply or eq). All inner surfaces of framework and drawers are to be finished by 0.8mm laminate of approved brand of white shade. The side credenza shall include single line drawers and bottom storage unit of specified size	S ft	14.68
5 Satties with Back	5	,	310	17.00



all internal and external surfaces painted in synthetic enamel of approved color complete job including cost of materials and labour (Face area measurement) Storage Almirah with Shutters	S ft	176.40
all internal and external surfaces painted in synthetic enamel of approved color complete job including cost of materials and labour	C ££	17/ 40
I BUOBE STE TO DE COVETED WITH TYMM WIND WOONED REBOING IPISINI SON I		
P/F of storage racks made out of 18mm plywood (Century (Sainik),		
side veneer 4mm+finishing etc)	S ft	78.00
veneer 4mm + finishing etc)	S ft	48.83
A) Both side veneer partition (frame + both side ply 12mm + both side		
finish with recommended MELAMINE POLISH as per manufacturers specifications all complete.		
bolts and studs at both ends, including jointing and finishing to a flush		
of frame and double skin 12mm thk plyboard (Make Sainik MR, Ecotec		
Maglo, Greenply or Eq) having composite thickness of 82mm consisting		
	J 1L	JU.40
•	S ft	50.48
French Spirit Polish including a coat of wood filler complete as per		
and design fixed in grooves or wodden beading finished all over by		
	Jeac	3.00
· · · · · · · · · · · · · · · · · · ·	Seat	3.00
wrinkle free and soft, complete job including cost of wood		
required density with polyester polyfill outer to keep the upholstery		
Supply & installation of sofa as per direction of Engineer in Charge two		
Sofa with Back		
(i) Without Arm	R ft	16.00
job		
P/F of satties made out of 18mm thk plywood with back rest with		
	100mm thk latex rubber pincare sheeting lined on both sides 12 mm medium density polyfoam mounted with handloom fabric complete job (i) Without Arm Sofa with Back Supply & installation of sofa as per direction of Engineer in Charge two / three seater sofa inner solid Frame structure and legs made of hard wood. The exposed wood surfaces (legs) are to be finished in Synthetic enamel paint. The seat cushion is made of multi layered foam of required density with polyester polyfill outer to keep the upholstery wrinkle free and soft, complete job including cost of wood framework, foam, polyfill fabric over cushion, back, arms and back etc as approved by Engineer in Charge (i) Sofa with Arm MDF Jali Providing and fixing of mdf Jaali 3/4" thick of approved specifications and design fixed in grooves or wodden beading finished all over by French Spirit Polish including a coat of wood filler complete as per specifications, the rate shall include the cost of grooving or provision of wooden beading etc Partition veneer finish P/F american walnut natural veneer partition (Make Century, Billion Maglo, Greenply or Eq) having composite thickness of 82mm consisting of frame and double skin 12mm thk plyboard (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) and also double skin 4MM THK American Walnut NATURAL VENEER of approvd make, including P/F of Frame work made of budloo/Fir wood of 2" thkness and 1.5" wide fixed to floor/ ceiling/Wall at a spacing of 600mm c/c by 6mm dia nuts and bolts and studs at both ends, including jointing and finishing to a flush finish with recommended MELAMINE POLISH as per manufacturers specifications all complete. A) Both side veneer partition (framework +single side ply12mm + both side veneer 4mm + finishing etc) b)single side veneer partition (framework +single side ply12mm +single side veneer 4mm+finishing etc) Storage Racks P/F of storage racks made out of 18mm plywood (Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq) for stationary room, without shutters, back	100mm thk latex rubber pincare sheeting lined on both sides 12 mm medium density polyfoam mounted with handloom fabric complete job (i) Without Arm Rft Sofa with Back Supply & installation of sofa as per direction of Engineer in Charge two / three seater sofa inner solid Frame structure and legs made of hard wood. The exposed wood surfaces (legs) are to be finished in Synthetic enamel paint. The seat cushion is made of multi layered foam of required density with polyester polyfill outer to keep the upholstery wrinkle free and soft, complete job including cost of wood framework, foam, polyfill fabric over cushion, back, arms and back etc as approved by Engineer in Charge (i) Sofa with Arm Seat MDF Jali Providing and fixing of mdf Jaali 3/4" thick of approved specifications and design fixed in grooves or wodden beading finished all over by French Spirit Polish including a coat of wood filler complete as per specifications, the rate shall include the cost of grooving or provision of wooden beading etc Partition veneer finish P/F american walnut natural veneer partition (Make Century, Billion Maglo, Greenply or Eq.) having composite thickness of 82mm consisting of frame and double skin 12mm thk plyboard (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) and also double skin 4MM THK American Walnut NATURAL VENEER of approvd make, including P/F of Frame work made of budloo/Fir wood of 2" thkness and 1.5" wide fixed to floor/ ceiling/Wall at a spacing of 600mm c/c by 6mm dia nuts and bolts and studs at both ends, including jointing and finishing to a flush finish with recommended MELAMINE POLISH as per manufacturers specifications all complete. A) Both side veneer partition (frame + both side ply 12mm + both side veneer 4mm + finishing etc) S ft D)single side veneer partition (frame + both side ply 12mm + both side veneer 4mm + finishing etc) S ft Storage Racks P/F of storage racks made out of 18mm plywood (Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq) for stationary room, without



	laminate of approved make & shade with necessary hardware attachments like channels, hydraulic auto hings, screws etc. Back side of the pedestal to be made of 12mm plywood of approved make. The pedestal shall include the following: a) Single line drawer of size 4.5" x 1' b) Bottom storage of size 1' 6" x 1'	SFT	21.07
16	made out of 18mm plyboard (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) finished in Laminate (Greenlam, Merino, Century or Eq), with a single line drawer finished internally in 0.8mm thk laminate of approved make & shade and pedestal outer sides finished in 1mm thk		
	P/F of 5'-0" wide 4'-0" height slip writing ledge using 18mm thick plywood (Make Sainik MR, Ecotec MR, Century, Archidply or eq.) finished with 4mm american walnut natural veneer of make (Make Century, Billion Maglo, Greenply or Eq) including Material and labour all complete.	Sft	21.40
15	Slip Writing table		
	Dead Lock	No	1.00
	TOWER BOLT 6"	No	6.00
	6" HANDLE BRASS	No	16.00
14	Providing and fixing of hardware items ALDROP WITH LOCKING ARRANGMENT 8"	No	6.00
13	plywood (Sainik, Ecotec, Century, Archid or Eq) with 3" thk top and side panels, all surfaces finished in 1mm laminate of approved shade and make. Complete job.	S ft	14.98
	Hinges (4") Finished in Tan brown 1.0mm laminate (Merino)	S ft	157.29
12	Providing and fixing of flush door shutters, core of block board, single leaf, 35mm thk solid door finished in 1mm thk laminate (century Mica shade 21127) on all sides and edges - complete job. Including cost of MS		
4.6	B) D - Cut holes and Wire Managers in glass Flush Door	NO	7.00
	A)Grinding	RFT	225.58
11	Making and doing itching, Moulding etc. of different profiles		
10	P/F of float glass in doors, windows and furniture tops but excluding Moulding, grinding, itching etc. 12 MM Thick Glass	Sft	184.20
10	A) 1'6" depth	S ft	57.75
	P/F of storage almirah made out of 18mm Plywood (Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq) including shutters finished in 1mm laminate. All outer sides are to be finished in 1 mm laminate 21127 Tan SF Merino lam or 134/2134 Mud Ash suede Greenlam (1mm thick) and interior sides by 0.8mm laminate of approved brand of white shade C J including cost of all materials, locks, 100mm aluminum handles and other accesories and labour (Face area measurement)		



	Particulars of Items	Unit	Tentative Quantity
1	Rate for Lighting point in 2x1.5 sqmm PVC insulated FR multistrand flexible cu wire and earthing with 1x1.5 sqmm wire through 25 mm dia 2mm thick PVC conduit. The job shall include the cost of wires, switches, face plate, jn boxes Boxes etc. The contractor shall made good the losses if any.		
	a) Primary point	No	33.00
	b) loop point from existing primary point	No	18.00
2	Rate for Fan point in 2x1.5 sqmm PVC insulated FR multistrand flexible cu wire and earthing with 1x1.5 sqmm wire through 25 mm dia 2mm thick PVC conduit. The job shall include the cost of wires, 6A switch, 6A socket, face plate, jn boxes, without MS Boxes etc. The contractor shall made good the losses if any.	No	2.00
3	Rate for Fan point in 2x1.5 sqmm PVC insulated FR multistrand flexible cu wire and earthing with 1x1.5 sqmm wire through 25 mm dia 2mm thick PVC conduit. The job shall include the cost of wires, 6A switch, 6A socket, face plate, jn boxes, with MS Boxes etc. The contractor shall made good the losses if any.	No	12.00
4	Rate for Heating point in 2x2.5 sqmm PVC insulated FR multistrand flexible cu wire and earthing with 1x2.5 sqmm wire through 25 mm dia 2mm thick PVC conduit. The job shall include providing of 1 No 16 Asocket, 1 No 16 A switch Face Plate.jn boxes etc. The contractor shall made good thelosses if any. as per details below:- a) Heating point with less than 11 mtr distance from DB	No	1.00
	b) Loop from existing Heating point point	No	1.00
	c)Heating point with more than 11 mtr distance from DB (<20	No	1.00
	mtr)	No	1.00
	d)Heating point with more than 20 mtr distance from DB	No	1.00
5	Rate for A/C point in 2x4.0 sqmm PVC insulated FR multistrand flexible cu wire and earthing with 1x4.0 sqmm wire through 25 mm dia 2mm thick PVC conduit. The job shall include providing of 1 No 20A SPN Industrial socket with box .etc. The contractor shall made good thelosses if any. (as per details below:-		
	a) A/C point with less than 11 mtr distance from DB	No	1.00
	b) A/C point with more than 11 mtr distance from DB	No	1.00
0	Rate for 6 A UPS / RP Point wiring in 2x2.5 sq. mm PVC Insulated flexible FR multristrand cu. Wire and earthing the third pin with 1x2.5 sqmm wire through PVC conduit 25 mm dia 2mm thick. The job shall include providing of 6/16 A sockets, 6/16 A switches, Face Plate.jn boxes etc. The contractor shall make good the losses if anyas per details below:-		_
6	a) 1 No 6A Socket & 1 No. 6A switch from UPS/RP DB	No	3.00
	b) Loop point of 1 No 6A Socket & 1 No. 6A switch from existing point	No	3.00
	c) 1 No. 6A socket, 1 No 16A Socket & 1 No. 16A switch from	No	1.00
	UPS/RP DB		1



	switch from existing point		
	e) 2 No. 6A socket, & 1 No. 16A switch from UPS/RP DB	No	2.00
	f) Loop of 2 No. 6A socket, & 1 No. 16A switch from existing point	No	2.00
	g) 3 No. 6A socket & 1 No. 16A switch from UPS/RP DB	No	2.00
	h) Loop of 3 No. 6A socket & 1 No. 16A switch from existing point	No	2.00
	i) 4 No. 6A socket from UPS/RP DB	No	1.00
	j) Loop 4 No. 6A socket from existing point	No	1.00
7	Supply & fixing of UPS Input Output point consisting of 2 No.16A Sockets on 6 module metal flush box with PVC plate & 2 No. blankers etc. The scope shall also include chiseling work and to make good the losses if any.	No	2.00
	Providing & fixing of PVC insulated FR multistrand copper wire		
	a) 1.5 sq mm	Mtr	250.00
8	b) 2.5 sq mm	Mtr	300.00
	c) 4.0 sq mm	Mtr	100.00
	d) 6.0 sq mm	Mtr	100.00
	e) 10.0 sq mm	Mtr	100.00
9	Supply, Laying & fixing of Cat 6 Data Cable in existing PVC conduit including termination charges	Mtr	500.00
10	Supply, laying & fixing of PVC insulated 0.4 sqmm 2 pair Telephone copper wire in existing PVC Conduit	Mtr	250.00
11	Supply & Laying of medium-Grade PVC Conduit of 25 mm dia & 2 mm thickness	Mtr	170.00
12	Supplying, installation, testing and laying of 8 SWG bare Copper wire for Earthing	Mtr	10.00
13	Providing, fixing, installation, commissioning & testing of 1' x 1' 24 Watt recess Square LED lighting fixtures (commercial/professional grade having die cast Aluminium body with total lumen output of 1920 or more)	No	17.00
14	Providing, fixing, installation, commissioning & testing of 15 Watt LED Recess Round lighting fixtures (commercial/professional grade having die cast Aluminium body with total lumen output of 1200 or more)	No	30.00
15	Providing, fixing, installation, commissioning & testing of 4 feet Batten 18W or above (commercial/professional grade having extruded polcarbonate housing with total lumen output of 1800 or more)	No	1.00
16	Providing, fixing, installation, commissioning & testing of 2 feet LED Batten 10W or above (commercial/professional grade having extruded polcarbonate housing with total lumen output of 1000 or more)	No	3.00
17	Supply, installation, commissioning & testing of 400 mm wall fan	No	6.00
18	Supply, installation, commissioning & testing of 300 mm Cabin fan	No	1.00
19	Supply, installation, commissioning & testing of 150 mm Exhaust fan	No	4.00
20	Supply, installation, commissioning & testing of 300 mm heavy duty Exhaust fan	No	1.00



21	Supply, installation, commissioning & testing of RJ-45 Krone networking data Jack including face plate with 1 No. RJ 45 jack including 1/2 module plate	No	16.00
22	Supply, installation, commissioning & testing of RJ-11 Telephone jacks including face plate with 1 No. Rj11 jack including 1 module plates	No	8.00
	Supply, installation, testing and commissioning of following items for Rack a) Supply, installation, testing and commissioning of Fully		
23	Loaded 24 port Patch Panel	No	1.00
	b) Supply & fixing of Patch Cords		22.22
	i) 1 Meters	No	20.00
	ii) 2 Meters	No	1.00
24	Supply, installation, testing and commissioning of 4 way double Door (TPN) (8+12module) Distribution Board	No	1.00
25	Supply, installation, testing and commissioning of 6 way double Door (TPN) (8+18module) Distribution Board	No	1.00
26	Supply, installation, testing and commissioning of 16 way double Door (SPN) Distribution Board	No	1.00
	Supply & fixing of MCCB/ MCB as per detail:-		
	a) MCCB TPN 100A 10KA	No	1.00
	b) MCCB TP 100A 10KA	No	1.00
27	c) MCB FP 6A/ 32A, 10KA C curve	No	4.00
	d) MCB DP 40 - 63A, 10KA C curve	No	2.00
	a) MCD DD 6 224 40KA C aumia		
	e) MCB DP 6 - 32A, 10KA C curve	No	9.00
	f) MCB SP 6 - 32A, 10KA C curve	No No	9.00
28	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required.	No	36.00
	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, AI Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1'	No	9.00
29	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, AI Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover Supply & fixing of Voltmeter/Ammeter in panel 3 phase digital	No cuft No	9.00 1.00
	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover	cuft No	9.00 1.00 2.00
29 30	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover Supply & fixing of Voltmeter/Ammeter in panel 3 phase digital type	No cuft No	9.00 1.00
29 30	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover Supply & fixing of Voltmeter/Ammeter in panel 3 phase digital type Supply & fixing of Indicator in panel Supply & fixing of thimbles	cuft No No	9.00 1.00 2.00 3.00
29 30 31 32	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover Supply & fixing of Voltmeter/Ammeter in panel 3 phase digital type Supply & fixing of Indicator in panel Supply & fixing of thimbles a) Cu/Aluminum thimbles (2.5/4/6/10sqmm)	cuft No No No	9.00 1.00 2.00 3.00
29 30 31	f) MCB SP 6 - 32A, 10KA C curve Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel suitable for 440 V, 3 phase 4 wire, 50 Hz power distribution system complete with cable inter connections, Al Bus Bar (TPN) & other accessories (per cuft). The panel shall be Indoor type, free standing, floor/ wall mounting, sheet metal clad, cubicle, dead front, dust and vermin proof type compartmentalized design fabricated out of powder coated 16 SWG sheet steel (shade grey), complete with Electrolytic high conductivity Aluminum TPN of appropriate rating insulated with heat shrinkable PVC sleeves, separate earth bus bar to be provided through out the length of the panel. Adequate size cable alley, painting, earthing, numbering, danger plate etc as required. 3'x3'x1' Providing & fixing of 100A FP Changeover Supply & fixing of Voltmeter/Ammeter in panel 3 phase digital type Supply & fixing of Indicator in panel Supply & fixing of thimbles	cuft No No	9.00 1.00 2.00 3.00




36	Supply & fixing of FP 63A Connector	No	1.00
37	Supply & fixing of Ceiling rose with pvc block	No	1.00
38	Labour charges for Electricians	per man day	2.00
39	Supply, installation, testing and commissioning of 4 zone intrusion panel including 12 V battery capable of providing backup of 24 hrs. with key operations, LED indicators, capable to connect with high voltage siren & in built digital communicator for i) CMS connectivity through LAN & Telephone ii) Micro controller .ed inbuilt speech auto dialer Supply, installation, testing and commissioning of Hand	No	1.00
40	operated Panic switch for security alarm system	No	5.00
41	Supply, installation, testing and commissioning of Magnetic contacts (heavy duty metal contacts) for security alarm system	No	1.00
42	Supply, installation, testing and commissioning of PIR motion sensor for security alarm system	No	2.00
43	Supply, installation, testing and commissioning of Beacon lights for security alarm system	No	1.00
44	Supply, installation, testing and commissioning of Hooter for security alarm system	No	2.00
45	SITC of Earthing station as called for in 2m x 50mm GI Pipe with Copper Electrode of 2100mmx25mmx6mm with requisite Back fill compound (2 bags of 15kg/ 30kg (1 bag)) acting as moisture booster ground enhancement material placed all around the electrode in a bore of minimum diameter of 5 inch to make a safe maintenance free chemical earthing. The whole assembly should be covered by a Cast Iron main hole cover fitted in concrete mixture of 4:1.around 6" perimeter and 6" depth. The copper electrode should be provided with Nut and bolt of Brass with Copper thimble of appropriate size.	No	1.00
46	Supply, installation, testing and commissioning of smoke detectors	No	4.00
47	Supply, installation, testing and commissioning of heat detectors	No	1.00
48	Dismantling of existing fire alarm panel along with allied items like smoke/heat detectors etc and subsequent reinstallation in developed premises as per requirement	No	1.00
49	Supply, installation, testing and commissioning of strobes/Horns	No	1.00
50	Supply, installation, testing & commissioning of manual call Point	No	1.00
51	Providing and fixing of Response Indicator	No	1.00




ANNEXURE B

DRAWINGS

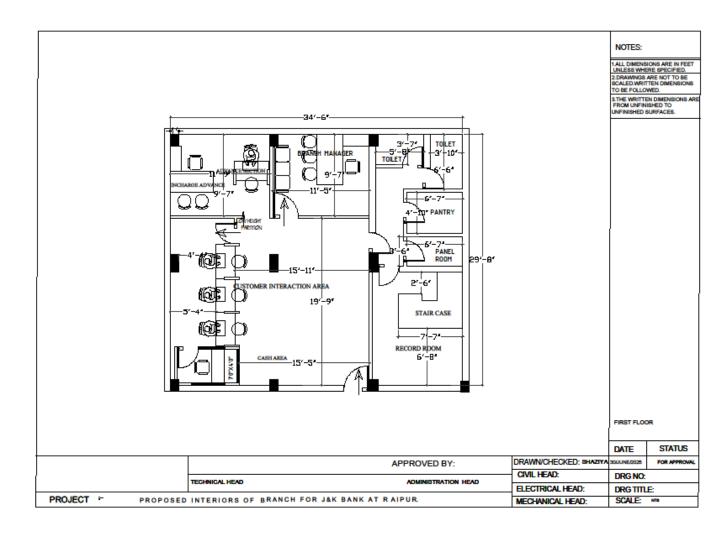



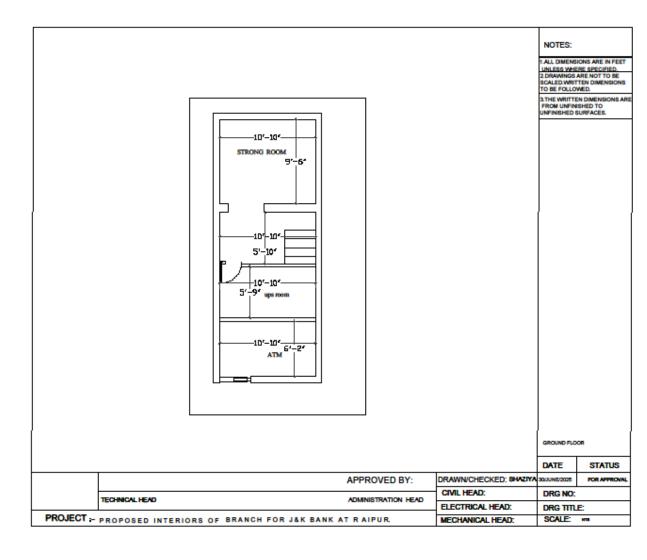



Annexure C LIST OF APPROVED MAKES

LIST OF MAKES OF DIFFERENT MATERIALS REQUIRED FOR DEVELOPMENT OF BUSINESS LINITS

	LIST OF MAKES OF DIFFERENT MATERIALS REQUIRED FOR DEVELOPMENT OF BUSINESS UNITS					
S. No	Description	Approved Brands to be used				
		INTERIOR AND FURNITURE ITEMS				
1	Plywood	Greenply (Ecotec), Century (Sainik), Archidply,				
2	Veneers	American Walnut Natural Veneer 4mm thick basic cost Rs 2800 per sheet of size 8'-0'' x 4'-0'' (Make Century, Billion Maglo, Greenply or Eq				
3	Laminates	Merino, Greenlam, Century, Archid				
4	Gypsum Board	Lafarge, Saint Gobain (Gyproc).				
5	Cement	Khyber, Ambuja Cements, Ultratech, ACC				
6	Vitrified Tiles (Full Body Premium Quality) Kajaria, Nitco, RAK, Jhonson, Hindware					
7	Ceramic Tiles Nitco, Kajaria, Somany, RAK					
8	Wall Putty Birla, JK or Eq					
9	Plastic Emulsion	Emulsion Asian paints, Nerolac, Dulux, Berger				
10	Synthetic enamel	Asian paints, Nerolac, Dulux, Berger				
11	Cement primer	Asian paints, Nerolac, Dulux, Berger				
12	Wood primer	Asian paints, Nerolac, Dulux, Berger				
13	Patch Fittings	Ozone (8400), Dorma (BTS 65), Enox (double cylinder)				
14	Dead Locks / Hardware	Godrej, Hettich, Ozone, Link				
15	G.I Pipes	B - Class; Prakash Surya, Jindal, Tata				
16	PVC Pipes	B- Type; Finolex, Astral, Prince, Supreme				
17	CPVC Pipes	Finolex, Astral, Prince				
	CI Pipe	Jindal, Finolex				
19	FLOAT GLASS/Toughened Glass	Asahi, Saint Gobain, Gold Plus				
20	Pump	Crompton Greeves, Kirloskar				
21	Hot Water Geyser	Venus, Crompton, Havells, Bajaj, Racold, Jaguar, Morphy Richards				
22	Sanitary Items	Basic series, Jaguar, Hindware, Cera, Parryware				
23	SS Railing	Grade 202 for interior works				
24	Roller Blinds	Vista, MAC				
25	Aluminum Sections	Jindal or Eq				
26	Aluminum Composite panels	ALSTONE, EUROBOND, Alstrong, Timex				



ELECTRICAL				
		TEMS		
1	Lighting Fixtures	Philips/ Wipro/ Crompton		
2	Wires	Havells/Finolex/RR Kabel/KEI/Paramount		
3	Telephone wires	Havells/Finolex/RR Kable		
4	Cables	Havells/Finolex/Gloster/KEI/Paramount		
5	Data Cable	Dlink/Legrand/Amp/Finolex		
6	Data Jacks	Legrand Mylinc/North West NOWA/D-link/ Schneider Livia		
7	Telephone Jacks	Legrand Mylinc/North West Nowa/Schneider Livia		
8	Switch Series	Legrand Mylinc/North West Nowa/Schneider Livia/Crabtree Murano		
9	мСВ	Legrand Mylinc/ Schneider Acti9/Crabtree Xpro/Lk AU SERIES		
10	мссв	Legrand Mylinc/ Schneider Acti9/DU-D-Sine Lk AU SERIES		
11	Changeover	Havells/HPL/Socomec/		
12	Fans	Havells/Crompton Greaves/Standard		
13	Conduits (Medium grade)	Prince/Polycab/Finolex/Alba Green		
14	Distribution Boards	Legrand Ekinox /Crabtree XPRO/Schneider Acti9		
15	CCTV cable	Havells/RR Kabel/Polycab/D-Link		
16	Chemical Earthing	ASH/JINDAL/JMV/ERICO		
17	Patch Cord	Dlink/Legrand/Amp/Finolex		
18	Networking Rack	Comrack/D-Link/Dynamic/Legrand		
18	Security Alarm Panel	Honeywell/ NS/ Securico		
19	Panic Switch	Honeywell/ NS/ Securico		
20	Magnetic contacts	Honeywell/ NS/ Securico		
21	Motion detectors	Honeywell/ NS/ Securico		
22	Electronic sirens	Honeywell/ NS/ Securico		
23	Beacon lights	Honeywell/ NS/ Securico		
24	Fire Alarm Panel	System Sensor/Agni/Siemens		
25	Smoke detector	Apollo/GE/System Sensor		
26	Heat Detector	Apollo/GE/System Sensor		
27	Strobes/ Horns	Apollo/GE/System Sensor		
28	Manual call point	Apollo/GE/System Sensor		
29	Response indicator	Apollo/GE/System Sensor		



Annexure D

STAGE/RUNNING PAYMENT SCHEDULE

	ANNEXURE- D SCHEDULE FOR STAGE/RUNNING PAYMENTS						
		Items to be completed	% age of estimated cost to be released				
4	Civil/Interior						
1.	Items						
	Stage 1st	Basic civil Works (Dismantling, Brickwork, Plaster etc.) Cement Concrete and tile work	Up to 40 %				
		Cement Concrete and the work	G P 33 13 73				
		False Ceiling					
		Granite work	Up to 60 % (Less payment				
	Stage 2nd	POP/Wall Putty	already done)				
		Ceramic Tiles	a. cad, 20110)				
		Gyp/veneer/Glass Partitions					
	Stage 3rd		As per the actual billed				
	(Final Bill)	Complete	amount				
	Electrical						
2.	Items						
	Stage 1st	Laying of conduits and wires in the floor for data cables and UPS along with its switch series Laying and fixing of conduits and wires for lighting points, wall fan points, exhaust fan points and	Up to 50 %				
		heating points SITC of lighting fixtures in the ceiling and distribution boards in the walls					
	Stage 2nd	Installation of switch series for lighting, heating, UPS, Data, Telephone. Installation of MCBs in the DBs	Up to 75 % (Less payments already Done)				
		Installation of wall fans					
	Stage 3rd (Final Bill)	Complete in all respects (Besides 1 and 2, Installation of panels, patch panels, rack, service cables etc.)	As per the actual billed amount				
3.	Furniture Works	Running bills to be submitted on detailed measurements	As per the actual billed amount				



Annexure E COMMERCIAL / PRICE BID FORMAT FOR COMPOSITE WORKS

S. No. **PARTICULARS OF ITEMS Tentative** Unit Rate **AMOUNT** (AS PER SPECIFICATIONS GIVEN IN ANNEXURE A) Quantity **BASIC CIVIL WORKS** 1 Cement Concrete Providing and laying of cement concrete with crushed stone aggregates A) 1:3:6 (1 cement : 3coarse sand : 6 crushed stone aggragate 20mm n/s) 10.34 Cu m B) 1:1.5:3 (1cement: 1.5coarse sand: 3 crushed stone aggragate 20mm n/s) Cu m 0.55 2 A) Reinforcement for RCC work KG 41.81 B) M/S grill KG 125.00 3 Brick Work Brick work with common burnt clay machine moulded F.P.S. (non modular) bricks of class designation 9" Wall 1:6 (1cement:6 coarse sand mix) Cu. M 8.01 Plaster Works Providing and doing of 15mm thk plaster in two coats, SQ. M 111.27 FINISHED CIVIL WORKS 5A Vitrified Tiles Providing and laying full polished vitrified tile free from all visible defects of size 600x600 SFT 1,467.66 Ceramic Tiles P/L of Ceramic Tiles free from all visible defects walls tiles of size 450x300mm and matching floor 450 x 300mm 260.33 SFT Granite work Providing and Laying of Granite and 20 - 25mm thick over 20mm thick cement mortar including cost of all material & **SFT** 322.58 Moulding (Granite Work) Moulding of Granite work including grinding and polishing on front nosing including all chargescomplete job A) Single line Moulding **RFT** 214.00 B) Double line Moulding **RFT** 5.35 Wall putty Providing and applying wall putty to walls using approved quality complete job SFT 3,205.41



10	Gyp Ceiling			
	P/F of gyp board ceiling (Gyproc, USG Boral or eq)	SFT	1,389.15	
	ON SITE CARPENTARY WORKS	31 1	1,307.13	
11	Partition, Gyp Finish			
a)	P/F of Partition having composite thickness of 99mm			
ŕ	consisting of frame and double skin 12mm thk plywood	SFT	254.10	
b)	P/F of single side gyp cladding	SFT	115.56	
12	P/f of frame work of aluminium for connecting gyp	31.1	113.30	
	partitions to ceiling	SFT	54.55	
13a	P/F of toughened glass (saint Gobain, Asahi India			
	glass, Gold Plus or eq) for doors.	SFT	71.16	
13b	P/F of toughened glass (saint Gobain, Asahi India glass, Gold Plus or eq) for partitions.	CET	204 57	
14	P/F of float glass (saint Gobain, Asahi India glass, Gold	SFT	201.56	
	Plus or eq) in , partitions and windows. Complete Job			
	A) 12mm thick Glass	SFT	35.31	
15	P/F of 4mm American walnut Beeding (3.5 inches			
	wide) on the joints of gyp and glass in partitions	RFT	246 10	
	PAINTING AND FINISHING WORKS	KFI	246.10	
16	Wall/Ceiling painting with acrylic emulsion paint of			
	approved brandd			
	A) With Priming Coat	Sq.M	389.00	
		3q./N	307.00	
17	Painting two coats of synthetic enamel over wood/steel and wood/steel based surfaces of approved brand			
	A) With Priming Coat	Sq.m	109.74	
	HARDWARE ITEMS	- 4		
18	P/F of different hardware items of approved brand and specifications.			
<u>1</u>	Floor Spring (DORMA-BTS -65 / ENOX-843 / Ozone			
	8400) with spindle, cover plate, top and bottom patches, pivot and lock, SS Handle complete set	CET	2.00	
<u>2</u>	Dead lock (Godrej)	SET No.	3.00 1.00	
<u>3</u>	Handle 8" (Godrej,link)	No.	14.00	
<u> 4</u>	Side Lock for Rolling Shutter	No.	2.00	
<u>5</u>	tower bolt 6"	No	4.00	
19	CPVC fiitings	.,,5		
a	20mm	RM	15.00	
b	15mm	RM	10.00	
20	Sanitary items		.0.00	
1	Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen			
	sink	МО	1.00	
2	Supply, installation, testing and commissioning of hot water	NO	1.00	
	electrical operated Geyser of approved make.			
	i) Capacity 03 ltrs	No.	1.00	



4 CP Angle valve No. 1.00 5 C P Gratting No. 1.00 6 C P Towel Ring (6"Dia) 7 C P Towel Rod (1"-6" length) 8 Beab Cock, long nose / short nose 9 PVC Connections (15mm Dia) 1"-6" Length No. 2.00 10 CP Cups No. 1.00 11 CP Soap Case No. 1.00 12 CP Hanger (6 No. Hooks) No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B - Type) 16 3" PVC Pipes (B - Type) 17 PVC P - Trap (4") (B- Type, No. 1.00 18 PVC P- Bend(3")PRINCE (B- Type, No. 1.00 19 PVC Teoe(4")PRINCE (B- Type, No. 1.00 20 PVC Teoe(4")PRINCE (B- Type, No. 1.00 21 Supply & installation - Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 23 Collapsible shutter collapsible shutter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer	3	CP Wall / Basin Mixer			
5 C P Gratting No. 1.00 6 C P Towel Ring (6"Dia) No. 1.00 7 C P Towel Rod (1" - 6" length) No. 1.00 8 Beab Cock, long nose / short nose No. 1.00 9 PVC Connections (15mm Dia) 1" -6" Length No. 2.00 10 CP Cups No. 2.00 11 CP Soap Case No. 1.00 12 CP Hanger (6 No. Hooks) No. 1.00 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B - Type) Rft 15.00 16 3" PVC Pipes (B - Type) Rft 10.00 17 PVC P - Trap (4") (B - Type, No. 1.00 18 PVC P - Bend(4") (B - Type, No. 1.00 19 PVC P - Bend(4") (B - Type, No. 1.00 20 PVC Floor Trap(4") (B - Type, No. 1.00 21 PVC Tee(4")PRINCE (B - Type, No. 1.00 22 PVC Tee(4")PRINCE (B - Type, No. 1.00 23 Supply & installation - Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge Collapsible shuuter Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer					
6 C P Towel Ring (6"Dia) 7 C P Towel Rod (1" - 6" length) 8 Beab Cock, long nose / short nose 9 PVC Connections (15mm Dia) 1" - 6" Length No. 1.00 10 CP Cups No. 2.00 11 CP Soap Case 12 CP Hanger (6 No. Hooks) No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B - Type) Rft 15.00 16 3" PVC Pipes (B - Type) Rft 10.00 17 PVC P - Trap (4") (B - Type, No. 1.00 18 PVC P- Bend(4") (B - Type, No. 1.00 PVC Toor Trap(4") (B - Type, No. 1.00 PVC Tee(4")PRINCE (B - Type, No. 1.00 PVC Tee(3")PRINCE (B - Type, No. 1.00 PVC Tee(3")PRINCE (B - Type, No. 1.00 PVC Tee(3")PRINCE (B - Type, No. 1.00 Cap PVC Tee(4")PRINCE (B - Type,		-			
7 C P Towel Rod (1' - 6' length) 8 Beab Cock, long nose / short nose 9 PVC Connections (15mm Dia) 1' -6' Length No. 1.00 9 PVC Connections (15mm Dia) 1' -6' Length No. 2.00 10 CP Cups No. 1.00 11 CP Soap Case No. 1.00 12 CP Hanger (6 No. Hooks) No. 1.00 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4' PVC Pipes (B - Type) Rft 15.00 16 3" PVC Pipes (B - Type) Rft 10.00 17 PVC P _ Trap (4") (B- Type, No. 1.00 18 PVC P- Bend(4") (B- Type, No. 1.00 19 PVC Floor Trap(4") (B- Type, No. 1.00 20 PVC Floor Trap(4") (B- Type, No. 1.00 21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 23 collapsible shutter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer		_			
8 Beab Cock, long nose / short nose 9 PVC Connections (15mm Dia) 1' -6" Length No. 1.00 10 CP Cups No. 2.00 11 CP Soap Case No. 1.00 12 CP Hanger (6 No. Hooks) No. 1.00 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B - Type) Rft 15.00 16 3" PVC Pipes (B - Type) Rft 10.00 17 PVC P - Trap (4") (B- Type, No. 1.00 18 PVC P- Bend(4") (B- Type, No. 1.00 19 PVC Floor Trap(4") (B- Type, No. 1.00 20 PVC Tee(4")PRINCE (B- Type, No. 1.00 21 PVC Tee(4")PRINCE (B- Type, No. 1.00 22 PVC Tee(4")PRINCE (B- Type, No. 1.00 23 PVC Tee(4")PRINCE (B- Type, No. 1.00 24 PVC Tee(3")PRINCE (B- Type, No. 1.00 25 PVC Tee(3")PRINCE (B- Type, No. 1.00 26 PVC Tee(3")PRINCE (B- Type, No. 1.00 27 PVC Tee(3")PRINCE (B- Type, No. 1.00 28 PVC Tee(3")PRINCE (B- Type, No. 1.00 29 PVC Toor Trap(4") (B- Type, No. 1.00 20 PVC Toor Get (a') Providing and fixing Roller Blindes with HEAD RAll. chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAll. chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 23 collapsible shutter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer					
9 PVC Connections (15mm Dia) 1'-6" Length No. 2.00 10 CP Cups No. 2.00 11 CP Soap Case No. 1.00 12 CP Hanger (6 No. Hooks) No. 1.00 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B-Type) Rft 15.00 16 3" PVC Pipes (B-Type) Rft 10.00 17 PVC P - Trap (4") (B-Type, No. 1.00 18 PVC P- Bend(3") PRINCE (B-Type, No. 1.00 19 PVC P-Bend(3") PRINCE (B-Type, No. 1.00 20 PVC Floor Trap(4") (B-Type, No. 1.00 21 PVC Tee(4") PRINCE (B-Type, No. 1.00 22 PVC Tee(3") PRINCE (B-Type, No. 1.00 23 PVC Tee(3") PRINCE (B-Type, No. 1.00 24 PVC Tee(3") PRINCE (B-Type, No. 1.00 25 PVC Tee(3") PRINCE (B-Type, No. 1.00 26 PVC Tee(3") PRINCE (B-Type, No. 1.00 27 PVC Tee(3") PRINCE (B-Type, No. 1.00 28 PVC Tee(3") PRINCE (B-Type, No. 1.00 29 PVC Tee(3") PRINCE (B-Type, No. 1.00 20 PVC Tee(3") PRINCE (B-Type, No. 1.00 21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 20 Collapsible shutter pf in position in Second class Kail wood. Complete Job 21 Collapsible shutter pf in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with botts nuts locking arrangement stopper handles including priming coat of approved steel primer		,	No.		
10 CP Cups 11 CP Soap Case 12 CP Hanger (6 No. Hooks) 12 CP Long Bend No. 1.00 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B-Type) 16 3" PVC Pipes (B_Type) 17 PVC P_Trap (4") (B-Type, No. 1.00 18 PVC P- Bend(4") (B-Type, No. 1.00 19 PVC P- Bend(4") (B-Type, No. 1.00 19 PVC P- Bend(3")PRINCE (B-Type, No. 1.00 20 PVC Floor Trap(4") (B-Type, No. 1.00 21 PVC Tee(4")PRINCE (B-Type, No. 1.00 22 PVC Tee(4")PRINCE (B-Type, No. 1.00 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shuuter 24 collapsible shuuter 25 collapsible shuuter 26 collapsible shuuter 27 collapsible shuuter 28 collapsible shuuter 29 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 35 collapsible shuuter 36 collapsible shuuter 37 collapsible shuuter 38 collapsible shuuter 39 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 35 collapsible shuuter 36 collapsible shuuter 37 collapsible shuuter 38 collapsible shuuter 39 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 35 c		·	No.		
17 CP Soap Case No. 1.00 18 CP Long Bend No. 1.00 19 VC Waste Pipe No. 1.00 10 No. 1.00 11 PVC Waste Pipe No. 1.00 11 PVC Waste Pipe No. 1.00 12 A" PVC Pipes (B- Type) Rft 15.00 13 PVC Pipes (B - Type) Rft 10.00 14 PVC P _ Trap (4") (B- Type, No. 1.00 15 PVC P - Bend(4") (B- Type, No. 1.00 16 PVC P - Bend(4") (B- Type, No. 1.00 17 PVC P - Bend(4") (B- Type, No. 1.00 19 PVC P- Bend(3")PRINCE (B- Type, No. 1.00 20 PVC Floor Trap (4") (B- Type, No. 1.00 21 PVC Tee(4")PRINCE (B- Type, No. 1.00 22 PVC Tee(3")PRINCE (B- Type, No. 1.00 23 Supply & installation - Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 21 Collapsible shutter 22 Collapsible shutter 23 Collapsible shutter 24 Collapsible shutter 25 Cft 2.340 26 Cft 2.340 27 Collapsible shutter 28 Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with botts nuts locking arrangement stopper handles including priming coat of approved steel primer					
12 CP Hanger (6 No. Hooks) 13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B - Type) 16 3" PVC Pipes (B _ Type) 17 PVC P _ Trap (4") (B - Type, No. 1.00 18 PVC P- Bend(4") (B - Type, No. 1.00 19 PVC P- Bend(3")PRINCE (B - Type, No. 1.00 20 PVC Floor Trap(4") (B - Type, No. 1.00 21 PVC Tee(4")PRINCE (B - Type, No. 1.00 22 PVC Tee(3")PRINCE (B - Type, No. 1.00 23 Supply & installation - Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 21 Supply & installation - Providing and fixed in position in Second class Kail wood. Complete Job 22 Collapsible shutter 23 Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00		·	No.		
13 CP Long Bend No. 1.00 14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B-Type) Rft 15.00 16 3" PVC Pipes (B_Type) Rft 10.00 17 PVC P_Trap (4") (B-Type, No. 1.00 18 PVC P-Bend(4") (B-Type, No. 1.00 19 PVC P-Bend(3")PRINCE (B-Type, No. 1.00 20 PVC Floor Trap(4") (B-Type, No. 1.00 21 PVC Tee(4")PRINCE (B-Type, No. 1.00 22 PVC Tee(3")PRINCE (B-Type, No. 1.00 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 21 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			No.	1.00	
14 PVC Waste Pipe No. 1.00 15 4" PVC Pipes (B-Type) Rft 15.00 16 3" PVC Pipes (B_Type) Rft 10.00 17 PVC P_Trap (4") (B-Type, No. 1.00 18 PVC P-Bend(4") (B-Type, No. 1.00 19 PVC P-Bend(3")PRINCE (B-Type, No. 1.00 20 PVC Floor Trap(4") (B-Type, No. 1.00 21 PVC Tee(4")PRINCE (B-Type, No. 1.00 22 PVC Tee(3")PRINCE (B-Type, No. 1.00 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shutter 24 collapsible shutter 25 collapsible shutter 26 collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steed dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			No.	1.00	
15 4" PVC Pipes (B-Type) 16 3" PVC Pipes (B_Type) 17 PVC P_Trap (4") (B-Type, 18 PVC P-Bend(4") (B-Type, 19 PVC P-Bend(3")PRINCE (B-Type, 19 PVC Floor Trap(4") (B-Type, 20 PVC Floor Trap(4") (B-Type, 21 PVC Tee(4")PRINCE (B-Type, 22 PVC Tee(3")PRINCE (B-Type, 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shutter 24 collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00		-	No.	1.00	
16 3" PVC Pipes (B_Type) 17 PVC P_Trap (4") (B-Type, 18 PVC P-Bend(4") (B-Type, 19 PVC P-Bend(3")PRINCE (B-Type, 10 PVC Floor Trap(4") (B-Type, 20 PVC Floor Trap(4") (B-Type, 21 PVC Tee(4")PRINCE (B-Type, 22 PVC Tee(3")PRINCE (B-Type, 31.00 21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 32 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 33 Collapsible shuuter 34 Collapsible shuuter 35 Collapsible shuuter 36 Collapsible shuuter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer		•	No.	1.00	
17 PVC P _ Trap (4") (B- Type, 18 PVC P- Bend(4") (B- Type, 19 PVC P- Bend(3")PRINCE (B- Type, 20 PVC Floor Trap(4") (B- Type, 21 PVC Tee(4")PRINCE (B- Type, 22 PVC Tee(3")PRINCE (B- Type, 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 27 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 28 Collapsible shuuter 29 Collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter 21 collapsible shuuter 22 collapsible shuuter 23 collapsible shuuter 24 collapsible shuuter 25 collapsible shuuter 26 collapsible shuuter 27 collapsible shuuter 28 collapsible shuuter 29 collapsible shuuter 29 collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			Rft	15.00	
18 PVC P- Bend(4") (B- Type, 19 PVC P- Bend(3")PRINCE (B- Type, 20 PVC Floor Trap(4") (B- Type, 21 PVC Tee(4")PRINCE (B- Type, 22 PVC Tee(3")PRINCE (B- Type, 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 21 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shuuter 24 collapsible shuuter 25 collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			Rft	10.00	
19 PVC P- Bend(3")PRINCE (B- Type, 20 PVC Floor Trap(4") (B- Type, 21 PVC Tee(4")PRINCE (B- Type, 22 PVC Tee(3")PRINCE (B- Type, 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shuuter 24 collapsible shuuter 25 collapsible shuuter 26 collapsible shuuter 27 collapsible shuuter 28 collapsible shuuter 29 collapsible shuuter 20 collapsible shuuter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer 20 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 20 Sqm 10.74 21 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job			No.	1.00	
20 PVC Floor Trap(4") (B-Type, 21 PVC Tee(4")PRINCE (B-Type, 22 PVC Tee(3")PRINCE (B-Type, 23 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 24 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 25 Collapsible shuuter 26 collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer 27 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 28 Collapsible shutter 29 Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			No.	1.00	
21 PVC Tee(4")PRINCE (B-Type, 22 PVC Tee(3")PRINCE (B-Type, 31 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 32 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 32 Collapsible shuuter 33 Collapsible shuuter 34 Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer			No.	1.00	
22 PVC Tee(3")PRINCE (B- Type, 21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 collapsible shuuter 24 collapsible shuuter 25 collapsible shuuter 26 collapsible shuuter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer 27 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 28 Cft 2.340 29 Collapsible shuuter 29 Collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter 20 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 35 collapsible shuuter 36 collapsible shuuter 37 collapsible shuuter 38 collapsible shuuter 39 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 36 collapsible shuuter 30 collapsible shuuter 30 collapsible shuuter 31 collapsible shuuter 32 collapsible shuuter 33 collapsible shuuter 34 collapsible shuuter 35 collapsible shuuter 36 collapsible shuuter 37 collapsible shuuter 38 collapsible shuuter 39 collapsible shuuter 40 collapsible shuuter 50 col			No.	1.00	
21 Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shuuter Collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00			No.	1.00	
with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 Collapsible shuuter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00	22	PVC Tee(3")PRINCE (B- Type,	No.	1.00	
with HEAD RAIL chain system drive complete to the entire satisfaction of engineer-in-charge Sqm 10.74 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 Collapsible shuuter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00					
satisfaction of engineer-in-charge 22 Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job 23 Collapsible shutter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00	21	Supply & installation- Providing and fixing Roller Blindes with HEAD RAIL chain system drive complete to the entire			
Providing wood work in frames of doors and windows and other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 Collapsible shuuter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00					
other similar works framed and fixed in position in Second class Kail wood. Complete Job Cft 2.340 Collapsible shuuter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00	22	Providing wood work in frames of doors and windows and	Sqm	10.74	
Cft 2.340 23 collapsible shuuter collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00	22	other similar works framed and fixed in position in Second			
collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00		class Kail wood. Complete Job	Cf+	2 240	
collapsible shutter p/f in position of collapsible shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00	23	collancible chuuter	CIL	2.340	
shutter with vertical channels 20x10x2mm braced with flat iron diagonals 20x5mm size with top bottom rail of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00					
of T iron 40x40x6 mm with 40mm steel dia pulleys complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00		shutter with vertical channels 20x10x2mm braced with			
complete with bolts nuts locking arrangement stopper handles including priming coat of approved steel primer Sft 31.00					
primer Sft 31.00					
Sft 31.00					
		primer			
			Sft	31.00	
	24	Demolition of existing RCC Ducts, brick work, stair,			
partitions etc. and disposing the same upto a lead of 50mtrs.					
a Removal of existing Cement Concrete in 1:3:6 mix Cu.M 10.00	a	Removal of existing Cement Concrete in 1:3:6 mix	Cu.M	10.00	
b removal of existing floor wall tiles Sft 1,500.00	b	removal of existing floor wall tiles	Sft	1,500.00	
c removal of gyp partn,laminate partn ,glazed partn cladding etc Sft 400.00	С				
d removal of gyp ceiling with frame Sft 1,365.00	d	removal of gyp ceiling with frame			



		,			
е	removalof ACP with frame	Sft	500.00		
f	removalof cash cabins	Rft	7.00		
g	removal of work stations ,officer tables etc with pedestals ,side tables	Rft	35.00		
h	removal of existing storage almirah, racks etc	Sft	200.00		
i	carriage of materials by mechanical support including loading unloading and stacking upto 20kms				
		Cum	18.00		
25	Providing and applying 6mm plaster of paris (POP)	Sft	500.00		
26	Repairs to the existing rolling shutter complete job	Sft	160.00		
27	Applying Silicon adhesive Band (999) Glue in ACP joints & gap filler.	RFT	90.00		
28	P/F of Aluminium composite panels (ACP) of. in wall cladding ceiling with necessary screws and dash fasteners complete job.	SFT	513.60		
29	P/F of various Aluminium sections in & under ACP on walls , ceiling				
	1"x1.5"	RFT	275.00		
	2.5"X1.5"	RFT	70.00		
30	Ply ceiling	Sft	120.90		
	Total of the items above Rs.				
			ADD GST 18% Rs.		
		Total I	ncluding all taxes Rs.		



В

S. No.	PARTICULARS OF ITEMS	Unit	Tentative Qty	Rate	Amount
	FURNITURE(LOOSE/ BOUGHT OUT/ ASSEMBLED)				
Α					
1	Front Desk	R ft	17.22		
2	Cash Tellers Table	R ft	4.73		
3	Unit Heads Table	S ft	32.03		
4	Side Credenza	S ft	14.68		
5a	Satties with Back				
	(i) Without Arm	R ft	16.00		
5b	Sofa with Back				
	(i) Sofa with Arm	Seat	3.00		
6	MDF Jali				
	Providing and fixing of mdfJaali 3/4" thick of approved specifications	S ft	50.48		
7	Partition veneer finish				
	P/F of Partition having composite thickness of 75mm consisting of double skin 12mm thk plywood				
	A) Both side veneer partition	S ft	48.83		
	b)single side veneer partition	S ft	78.00		
8	Storage Racks				
	P/F of storage racks made out of 18mm plywood(Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq)	S ft	176.40		
9	Storage Almirah with Shutters				
	P/F of storage almirah made out of 18mm Plywood (Century (Sainik), Greenply (Ecotec), Archidply, Sonear or eq)				
	A) 1'6" depth	S ft	57.75		
10	P/F of float glass in doors , windows and furniture tops but excluding moulding, grinding, itching etc.				
	12 MM Thick Glass	Sft	184.20		
11	Making and doing itching, moulding etc. of different profiles				
	A) Grinding	RFT	225.58		
	C) D - Cut holes and Wire Managers in glass	NO	7.00		
12	Flush Door				
	Providing and fixing of flush door shutters, core of block board, single leaf, 35mm thk solid door finished by 1 mm laminate				
	Finished in Tan brown 1.0mm laminate (Merino)	S ft	157.29		



13	M/s a "Central table" of desired dimensions , made out of 18mm plywood (green	S ft	14.98			
14	Providing and fixing of hardware items					
	ALDROP WITH LOCKING ARRANGMENT 8"	No	6.00			
	6" HANDLE BRASS	No	16.00			
	TOWER BOLT 6"	No	6.00			
	Dead Lock	No	1.00			
15	Slip Writing table					
	P/F of 5'-0" wide 4'-0" height slip writing ledge using 18mm thick plywood of approved make finished with 4mm thick recon veneer including Material and labour all complete.	Sft	21.40			
16	Manufacturing and supplying a "Pedastal Unit" of desired dimension and to be fixed to unit head table/front desk/cash counter with the help of screws etc. complete job.					
		Sft	21.07			
	Total of the items above Rs.					
			ADD GS	Γ 18% Rs.		
		Tota	l Including all	taxes Rs.	-	



Commercial / Price Bid for Redevelopment of Branch Raipur Chhattisgarh along with onsite ATM by way of Electrical Work

	by way of Elec	zerreat 170	· · · · · · · · · · · · · · · · · · ·		
S.No.	Particulars of Items	Unit	Quantity	Rate	Amount
	Wiring for lighting point				
1	a) Primary point	No	33.00		
1 2 3	b) loop point from existing primary point	No	18.00		
2	Wiring for Fan point without box	No	2.00		
3	Wiring for Fan point with MS box	No	12.00		
	Wiring for 3 pin 16 A Heating point in 2.5 sqmm				
	a) with less than 11 mtr distance from DB	No	1.00		
4	b) Loop with less than 11 mtr distance from existing point	No	1.00		
	c) with more than 11 mtr distance from DB (<20 mtr)	No	1.00		
	d) with more than 20 mtr distance from DB	No	1.00		
	Wiring for 3 pin 16 A A/C point in 4 sq.mm				
5	a) with less than 11 mtr distance from DB	No	1.00		
	b) with more than 11 mtr distance from DB	No	1.00		
	Wiring for UPS/RP point				
	a) 1 No 6A Socket & 1 No. 6A switch from UPS/RP DB	No	3.00		
	b) Loop point of 1 No 6A Socket & 1 No. 6A switch from existing point	No	3.00		
	c) 1 No. 6A socket, 1 No 16A Socket & 1 No. 16A switch from UPS DB	No	1.00		
	d) Loop of 1 No. 6A socket, 1 No 16A Socket & 1 No. 16A switch from existing point	No	1.00		
6	e) 2 No. 6A socket, & 1 No. 16A switch from UPS DB	No	2.00		
	f) Loop of 2 No. 6A socket, & 1 No. 16A switch from existing point	No	2.00		
	g) 3 No. 6A socket & 1 No. 16A switch from UPS DB	No	2.00		
	h) Loop of 3 No. 6A socket & 1 No. 16A switch from existing point	No	2.00		
	i) 4 No. 6A socket from UPS DB	No	1.00		
	j) Loop 4 No. 6A socket from existing point	No	1.00		
7	Supply & fixing of UPS Input Output point	No	2.00		
8	Providing & fixing of PVC insulated copper wire				



	a) 1.5 sq mm	Mtr	250.00	
	b) 2.5 sq mm	Mtr	300.00	
	c) 4.0 sq mm	Mtr	100.00	
	d) 6.0 sq mm	Mtr	100.00	
	e) 10.0 sq mm	Mtr	100.00	
9	Supply, Laying & fixing of Cat 6 Data Cable	Mtr	500.00	
10	Supply, laying & fixing of 2 pair Telephone copper wire	Mtr	250.00	
11	Supply & Laying of PVC Conduit	Mtr	170.00	
12	Supplying, installation, testing and laying of 8 SWG bare Copper wire for Earthing	Mtr	10.00	
13	Providing, fixing, installation, commissioning & testing of 1' x 1' 24 watt LED Square recess lighting fixture	No	17.00	
14	Providing, fixing, installation, commissioning & testing of 15 Watt LED Recess Round lighting fixtures	No	30.00	
15	Providing, fixing, installation, commissioning & testing of lighting fixtures 4 Feet LED Batten	No	1.00	
16	Providing, fixing, installation, commissioning & testing of 2' LED Batten	No	3.00	
17	SITC of 400 mm wall fan	No	6.00	
18	SITC of 300 mm Cabin fan	No	1.00	
19	SITC of 150 mm Exhaust fan	No	4.00	
20	SITC of 300 mm Exhaust fan	No	1.00	
21	SITC of networking data jacks	No	16.00	
22	SITC of Telephone jacks	No	8.00	
	SITC of following items for Rack		-	
	a) 24 port Fully Loaded Patch Panel	No.	1.00	
23	b) Patch Cords			
	i) 1 Meters	No	20.00	
	ii) 2 Meters	No	1.00	
24	SITC of 4 way double Door (TPN) DB	No	1.00	
25	SITC of 6 way double Door (TPN) DB	No	1.00	
26	SITC of 12 way double Door (SPN) DB	No	1.00	
	Supply & fixing of MCCB/ MCB as per detail:-			
	a) MCCB TPN 100A 10KA	No	1.00	
27	b) MCCB TP 100A 10KA	No	1.00	
	c) MCB FP 6A-32A, 10KA C curve	No	4.00	
	d) MCB DP 40 - 63A C curve	No	2.00	
	e) MCB DP 6 - 32A C curve	No	9.00	



	f) MCB SP 6 - 32A C curve	No	36.00	
28	Rate for fabrication, supply, installation, testing and commissioning of compact cubical indoor type dust proof sheet steel powder coated LT switchgear panel Size:- 3'x3'x1'	cuft	9.00	
29	Providing & fixing of 100A FP Changeover	No	1.00	
30	Supply & fixing of Voltmeter/Ammeter three phase digital type	No	2.00	
31	Supply & fixing of indicator in panel	No	3.00	
	Supply & fixing of thimbles			
32	a) Cu/Aluminum thimbles (2.5/4/6sqmm)	No	150.00	
33	Supply & fixing of 3 pin 6A top	No	4.00	
34	Supply & fixing of 3 pin 16A top	No	2.00	
35	Supply & fixing of ferule	No	300.00	
36	Supply & fixing of 63A Connector	No	1.00	
37	Supply & fixing of ceiling rose with PVC block	No	1.00	
38	Labour charges for Electricians	per man day	2.00	
39	Supply, installation, testing and commissioning of 4 zone intrusion panel including 12 V battery capable of providing backup of 24 hrs. with key operations, LED indicators, capable to connect with high voltage siren & in built digital communicator for i) CMS connectivity through LAN & Telephone ii) Micro controller .ed inbuilt speech auto dialer	No	1.00	
40	Supply, installation, testing and commissioning of Hand operated Panic switch for security alarm system	No	5.00	
41	Supply, installation, testing and commissioning of Magnetic contacts (heavy duty metal contacts) for security alarm system	No	1.00	
42	Supply, installation, testing and commissioning of PIR motion sensor for security alarm system	No	2.00	
43	Supply, installation, testing and commissioning of Beacon lights for security alarm system	No	1.00	
44	Supply, installation, testing and commissioning of Hooter for security alarm system	No	2.00	
45	SITC of Chemical Earthling station(s)	No	1.00	
46	Supply, installation, testing and commissioning of smoke detectors	No	4.00	



47	Supply, installation, testing and commissioning of heat detectors	No	1.00			
48	Dismantling of existing fire alarm panel along with allied items like smoke/heat detectors etc and subsequent reinstallation in developed premises as per requirement	JOB	1.00			
49	Supply, installation, testing and commissioning of strobes/Horns	No	1.00			
50	Supply, installation, testing & commissioning of manual call Point	No	1.00			
51	Providing and fixing of Response Indicator	No	1.00			
	Tot	al Amount	for items abov	re(Rs.)		
	Add GST @ 18%					
total including GST (Rs.)						
Gran	d Total for Civil-Interior, Furniture and	Electrica	l Items incl	udina		
				(Rs.)		